

item #	
model #	
project #	
sis#	
aia #	



# SMOKER CHS082E

Static oven with external smoking device

# CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Total thermic insulation with rock or glass wool
- Long lasting frontal seals made up of food grade of high heat resistance
- Static heating provided by low consumption wire heating element that coils up all the chamber
- Snap-shut door
- Mounted on four 125mm diameter castors, two of which with brake
- All-around rubber bumpers
- Tightness cavity with radiuses corners, built-in drip tray and drainage system

### FUNCTIONAL FEATURES

- $\bullet$  Electronic control panel of temperature, time, core probe,  $\Delta t$  and smoking with LCD touch-screen
- Operating temperature 30°C 160°C
- End-of-cycle buzzer
- Chamber with safety thermostat
- Internal drain for easy cleaning
- Condensation drain tray
- Delayed start timer

#### STANDARD SUPPLY

- Multipoint core probe with the possibility to register 30 different temperatures and save them in the HACCP report (available only with USB port device)
- Glazed door plus lighting
- Removable GN 2/1 and GN 1/1 tray racks
- External stainless steel smoke generator with ash tray
- USB port saving device HACCP

# OPTIONS & ACCESSORIES

EcoWash cleaning system	Water filter system
Opposite side opening	Hooks kit
Grids	Bag of wooden chips
Trays	Detergent/Rinsing agen

#### MODULINESRL



### TECHNICAL INSTALLATION DIAGRAM

Electricity supply cable inlet




Smoke exhaustion vent



Chamber drain



Important - Drawing and dimensions refer to the standard version. They may change with the addition of accessories or options.

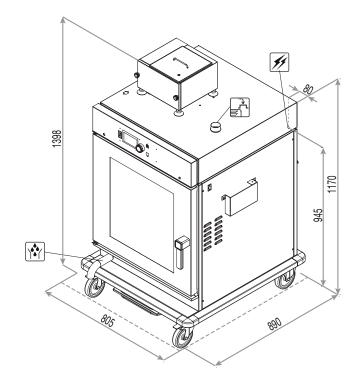

Overall dimensions (W x D x H) - mm

805 x 890 x 1398h

Power supply

AC 220-240V 50/60Hz

Total input [kW]

2,95 (230V)

Amps. [A]

12,9 (230V)

Working temperature [°C]

30 ÷ 160

Trays capacity - distance [mm]


8 x GN 2/1 - (75) 16 x GN 1/1 - (75)

Product max capacity [Kg]

55

Net weight [Kg]

110

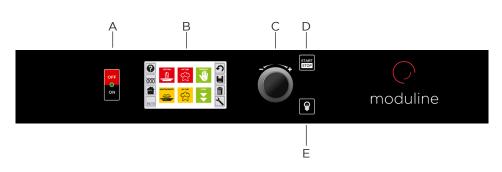

- A ON/OFF switch
- B Display Touch Screen
- C Setting knob and select "ENTER"
- D "START/STOP" button
- E Chamber light button

#### MODULINESRL