

item #	
model #	
project #	
sis#	
aia #	



COOK&HOLD CSD212E

Static low-temperatures cook&hold drawers with separate controls

CONS	TR	UCI	ΓΙΟΝ
	FF.	ΔΤΙ	IDES

- Tightness chamber with radiused corners
- Total thermic insulation with rock wool
- Long lasting drawers seals made up of food grade of high heat resistance
- Static heating provided by low consumption wire heating element that coils up all the chamber
- Ergonomic and fully built-in drawers handle with magnetic closure

FUNCTIONAL FEATURES

- Two electronic controls of the time, temperature and core probe
- Operating temperature 30° ÷ 120°C
- Humidity vents
- Chamber with safety thermostat
- Manual keyboard lock

STANDARD SUPPLY

- Removable GN1/1 tray racks
- Internal core probe
- On feet

OPTIONS & ACCESSORIES

Set wheels
Grids

ш	Riack coloni
	Built-in fram

	Trays
_	



TECHNICAL INSTALLATION DIAGRAM


Electricity supply cable inlet




Humidity exhaustion vent



Important - Drawing and dimensions refer to the standard version. They may change with the addition of accessories or options.

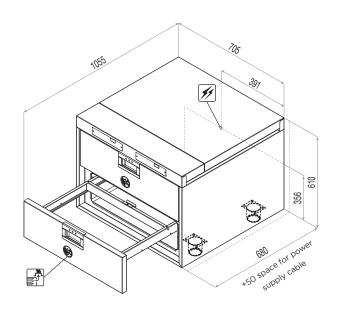

Overall dimensions (W x D x H) - mm	705 x 680 x 610h	Trays capacity	2 GN 1/1
Power supply	AC 220-240V 50/60Hz	Containers max height [mm]	150
Total input [kW]	1,4 (230V)	Product max capacity [Kg]	12
Amps. [A]	6,1 (230V)	Net weight [Kg]	67
Working temperature [°C]	30 ÷ 120	'	

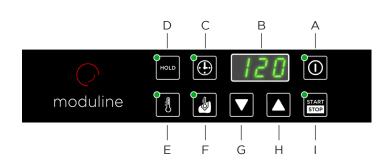

- A ON/OFF switch
- B Display
- C Time selection key
- D Keeping warm key
- E Temperature selection key
- F Core probe on/off key
- G Temperature decrease key
- H Temperature increase key
- I START/STOP key

MODULINESRL