



COMBI GCE101D

Combi oven

CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Total thermic insulation with rock or glass wool
- Long lasting front seals made up of food grade of high heat resistance
- Removable side racks to facilitate cleaning
- Internal drain for easy cleaning
- Ventilated heating provided by high efficiency protected heating elements
- Snap-shut door
- Adjustable feet
- Easy access to facilitate maintenance and repair
- Double low-emission glass door with internal ventilation
- Openable inside glass of the door
- Condensation drip tray under the door and connected to the oven drainage system.

FUNCTIONAL FEATURES

- Elettronic control panel with digital display, keys and knob
- Simplified, user-friendly controls
- Periodic reversal of direction of rotation of the fan for better air distribution
- Automatic stopping of fans when the door is opened
- End-of-cycle buzzer
- Chamber with safety thermostat
- Operating temperature: from 30°C to 280°C in Convection mode, from 30°C to 280°C in Mixed Steam - Convection mode, from 30°C to 130°C in Direct Steam mode
- The cooking program can be divided into different phases
- Automatic humidity exhaust system after cooking
- Self-diagnosis system
- Steam condensation system
- Chamber cooling program
- IdealWarm function: the intelligent temperature decrease in the cavity at the end of the cooking cycle allows perfect warm holding
- Climachef system
- FlashDry instant dehumidification function of the chamber.
- PadLock: key lock system with password
- ProTime system allows you to set the date and the time you want the oven to preheat or start working.
- Glazed door plus lighting
- Removable GN1/1 tray racks


OPTIONS & ACCESSORIES


- | | | |
|--|--|--|
| <input type="checkbox"/> Supports | <input type="checkbox"/> USB port | <input type="checkbox"/> Trays |
| <input type="checkbox"/> Multipoint core probe | <input type="checkbox"/> SpeedGrade fan speed adjustment | <input type="checkbox"/> Sound silencer |
| <input type="checkbox"/> Needle core probe, thin | <input type="checkbox"/> Water filter system | <input type="checkbox"/> Air condensation hood |
| <input type="checkbox"/> External hand shower | <input type="checkbox"/> Grids | <input type="checkbox"/> Opposite side opening |
| | | <input type="checkbox"/> Side racks 600x400 |
| | | <input type="checkbox"/> Door lock with key |




moduline


TECHNICAL INSTALLATION DIAGRAM

Electricity supply
cable inlet 



Safety vent
humidity 

Chamber drain 

Softened
water inlet 

Adjustable vent for
excess humidity 

Important - Drawing and
dimensions refer to the
standard version.
They may change with the
addition of accessories or
options.

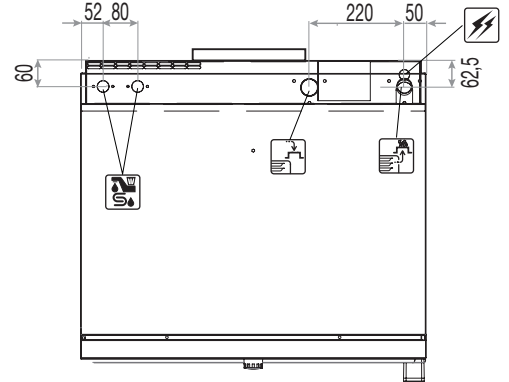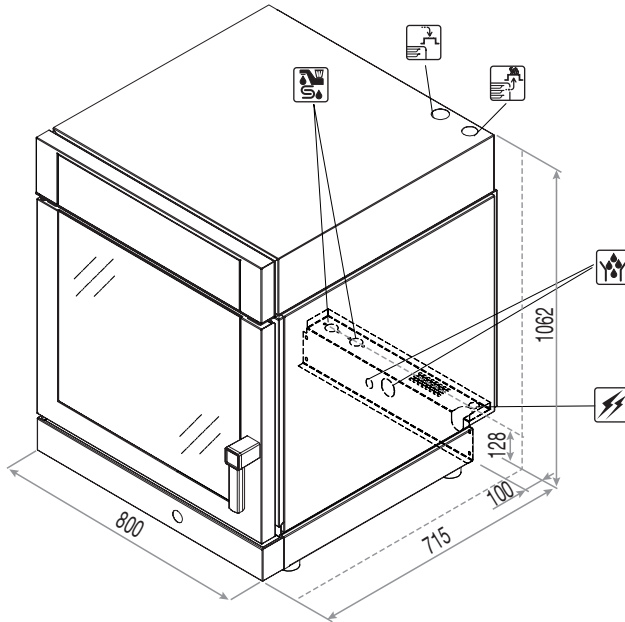

Overall dimensions
(W x D x H) - mm

800 x 715 x 1062h

Product max
capacity [Kg]

24

Trays capacity

10 x GN 1/1
or 600x400

Total input
[kW]

15,5 (400V)

Distance
[mm]

64

Amps.
[A]

22,4 (400V)

Power supply

380-415V 3N 50/60Hz

Water pressure
[kPa]


150 ÷ 500

Working
temperature [°C]

30 ÷ 280

Net weight
[Kg]

100

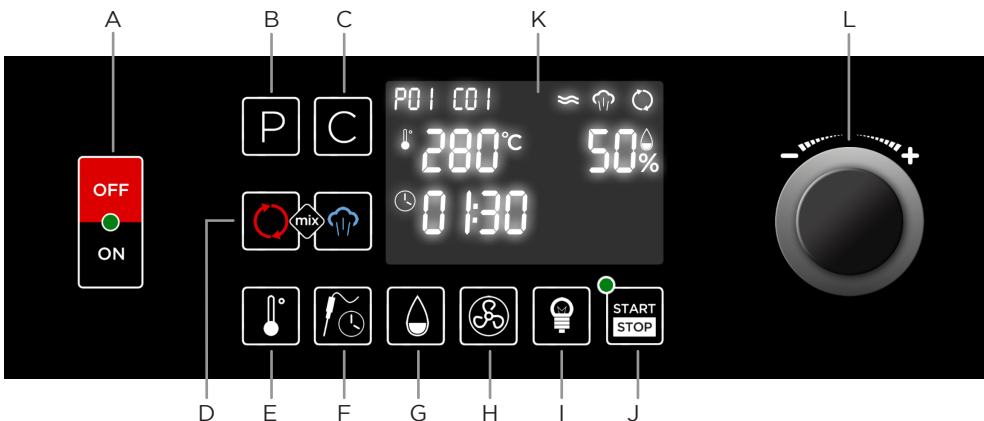

- A ON/OFF switch
- B Program and back key
- C Cycle key
- D Cooking mode key
- E Cavity temperature key
- F Probe / Time key
- G Humidity key
- H Fan speed key
- I Light key
- J START/STOP key
- K Digital display
- L Knob to set and enter key

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it