



## REThERM GRE106DW/EW

Regeneration oven  
to reheat refrigerated  
food (+3°C)

### CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Total thermic insulation with rock or glass wool
- Long lasting front seals made up of food grade of high heat resistance
- Removable side racks to facilitate cleaning
- Internal drain for easy cleaning
- Ventilated heating provided by high efficiency protected heating elements
- Snap-shut door
- Adjustable feet
- Easy access to facilitate maintenance and repair
- Double low-emission glass door with internal ventilation
- Condensation drip tray under the door and connected to the oven drainage system.

### FUNCTIONAL FEATURES

- Electronic control panel with digital display (D) or electronic with LCD touch-screen display (E)
- Simplified, user-friendly controls
- Periodic reversal of direction of rotation of the fan for better air distribution
- Automatic stopping of fans when the door is opened
- End-of-cycle buzzer
- Chamber with safety thermostat
- Operating temperature 30°C ÷ 160°C
- The regeneration program can be divided into different phases
- Self-diagnosis system
- MultiLevel function: Combi is able to manage different dishes with different cooking times or temperatures (only for E version)
- IdealWarm function: the intelligent temperature decrease in the cavity at the end of the cooking cycle allows perfect warm holding
- Climachef system
- PadLock: key lock system with password
- ProTime system allows you to set the date and the time you want the oven to preheat or start working
- Glazed door plus lighting
- Removable GN1/1 tray racks
- EcoWash self-cleaning system

### OPTIONS & ACCESSORIES

- |  |  |  |
|--|--|--|
| <input type="checkbox"/> Supports                  | <input type="checkbox"/> Openable inside glass of the door | <input type="checkbox"/> Grids                                   |
| <input type="checkbox"/> Single-point core probe   | <input type="checkbox"/> Stacking kit                      | <input type="checkbox"/> Trays                                   |
| <input type="checkbox"/> Multipoint core probe     | <input type="checkbox"/> Integrated water storage tank     | <input type="checkbox"/> Sound silencer                          |
| <input type="checkbox"/> Needle core probe, thin   | <input type="checkbox"/> Usb port                          | <input type="checkbox"/> Air condensation hood                   |
| <input type="checkbox"/> External hand shower      | <input type="checkbox"/> SpeedGrade fan speed adjustment   | <input type="checkbox"/> One Touch Software (only for E version) |
| <input type="checkbox"/> Integral quenching system | <input type="checkbox"/> Water filter system               | <input type="checkbox"/> Opposite side opening                   |
|  |  | <input type="checkbox"/> Door lock with key                      |

**MODULINESRL**

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY  
 tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it

# moduline

## TECHNICAL INSTALLATION DIAGRAM

Electricity supply  
cable inlet



Safety vent  
humidity



Chamber drain





Softened  
water inlet



Adjustable vent for  
excess humidity



**Important** - Drawing and  
dimensions refer to the  
standard version.  
They may change with the  
addition of accessories or  
options.

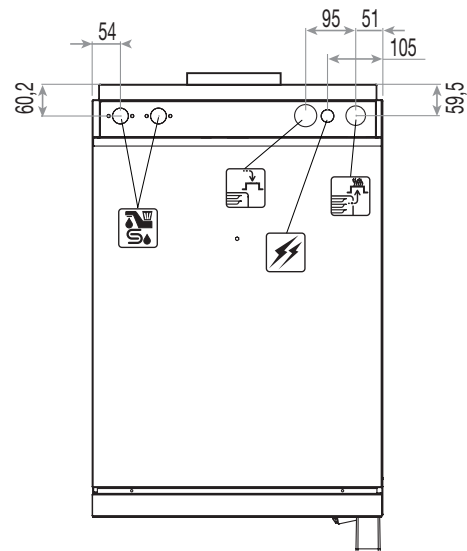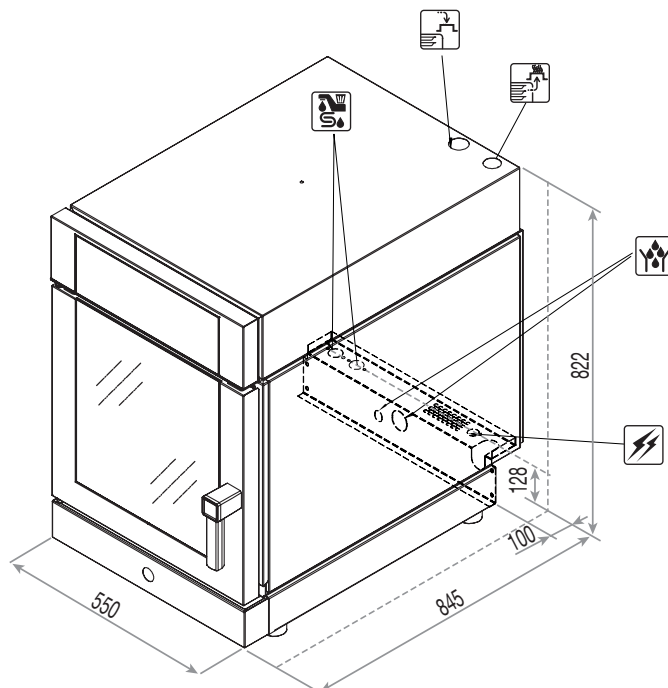

Overall dimensions  
(W x D x H) - mm

550 x 845 x 822 h

Trays capacity

6 x GN 1/1

Plates capacity

12 Ø 200-260  
6 Ø 270-320

Distance  
[mm]

64

Power supply

AC 220-240V 50/60Hz

Working  
temperature [°C]

30 ÷ 160

Product max  
capacity [Kg]

15

Total input  
[kW]

3,6 (230V)

Amps.  
[A]


15,7 (230V)

Water pressure  
[kPa]

150 ÷ 500


Net weight  
[Kg]

90

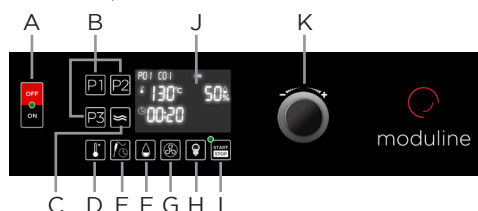

### D Version

- |                                  |                                    |
|----------------------------------|------------------------------------|
| A ON/OFF switch                  | F Cavity humidity control key      |
| B Pre-set program keys           | G Fan speed control key (optional) |
| C Holding function key           | H Cavity light key                 |
| D Cavity temperature control key | I Start/stop key                   |
| E Time / core probe control key  | J Display                          |
|                                  | K Encoder knob                     |

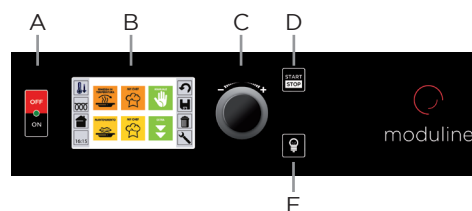

### E Version

- |                                   |
|-----------------------------------|
| A ON/OFF switch                   |
| B Display Touch Screen            |
| C Setting knob and select "ENTER" |
| D "START/STOP" button             |
| E Chamber light button            |

**MODULINESRL**

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY  
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it