



moduline

item #
model #
project #
sis #
aia #



HOLD HHT162E

Warm holding cabinet

CONSTRUCTION FEATURES

- Tightness chamber with radiuses corners
- All-around rubber bumpers
- Total thermic insulation with rock or glass wool
- Long lasting front seal, made up of food-grade and high-heat resistant silicone
- Double door to reduce mostly the drop in temperature at opening
- Removable side racks to facilitate cleaning
- Static heating provided by low consumption wire heating element that coils up all the chamber
- Ergonomic and fully built-in door handle with magnetic closure
- Mounted on four 150 mm diameter castors, two of which with brake
- Ergonomic handle for pushing and guiding
- Easy access to facilitate maintenance and repair
- Opposite side opening

FUNCTIONAL FEATURES

- Electronic control of the temperature
- Operating temperature 30° ÷ 120°C
- Adjustable humidity vents on the door
- Chamber with safety thermostat
- Manual keyboard lock

STANDARD SUPPLY

- Removable GN 2/1 and GN 1/1 tray racks

OPTIONS & ACCESSORIES

- Kit feet
- Grids
- Trays


MODULINESRL


Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it





moduline

TECHNICAL INSTALLATION DIAGRAM

Electricity supply
cable inlet 


Vent for excess
humidity 

Important - Drawing and
dimensions refer to the
standard version.
They may change with the
addition of accessories
or options.

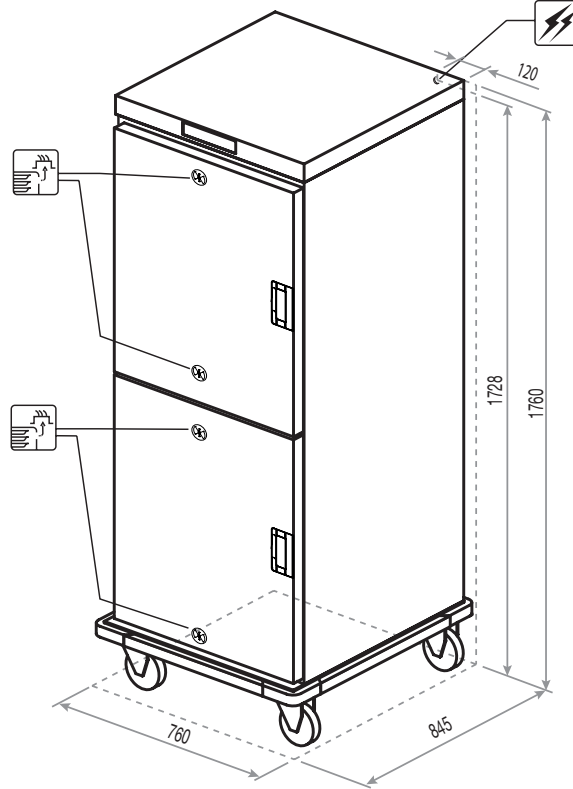

| | |
|------------------------------------------------|---------------------------------------------------------|
| Overall dimensions (W x D x H) - mm | 760 x 845 x 1760 h |
| Trays capacity - distance [mm] | 16 x GN 2/1 - (75) 32 x GN 1/1 - (75) |
| Tray max. height GN 2/1 [mm] | 16 x 65 (h) 6 x 150 (h) 4 x 200 (h) + 4 x 65 (h) |
| Tray max. height GN 1/1 [mm] | 32 x 65 (h) 12 x 150 (h) 8 x 200 (h) + 8 x 65 (h) |
| Power supply | AC 220-240V 50/60Hz |

| | |
|--------------------------------------|-------------|
| Total input [kW] | 3 (230V) |
| Amps. [A] | 13,1 (230V) |
| Working temperature [°C] | 30 ÷ 120 |
| Product max capacity [Kg] | 115 |
| Net weight [Kg] | 106 |

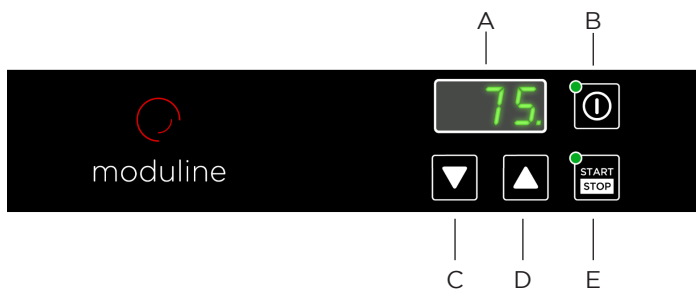

- A Display
- B ON/OFF switch
- C Temperature decrease key
- D Temperature increase key
- E START/STOP key

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it