

item #	
model #	
project #	
sis#	
aia #	



### HOLD **HSW011ER**

Warm holding drawer, built-in + remote control

CONST	R	U	IC	ΤI	O	Ν
	=	۸	ΤI	10		C

- Tightness chamber with radiused corners
- Total thermic insulation with rock or glass wool
- Long lasting drawers seals made up of food grade of high heat resistance
- Static heating provided by low consumption wire heating element that coils up all the chamber
- Ergonomic and fully built-in drawers handle with magnetic closure
- Built-in version with remote controls

# FUNCTIONAL FEATURES

- Electronic control of the temperature
- Operating temperature 30° ÷ 120°C
- Humidity vents
- Chamber with safety thermostat
- Manual keyboard lock

### STANDARD SUPPLY

• Removable GN1/1 tray racks

# OPTIONS & ACCESSORIES

☐ Grids

□ Trays□ Black colour

☐ Built-in frame



#### TECHNICAL INSTALLATION DIAGRAM


Electricity supply cable inlet




Humidity exhaustion vent



Important - Drawing and dimensions refer to the standard version. They may change with the addition of accessories or options.

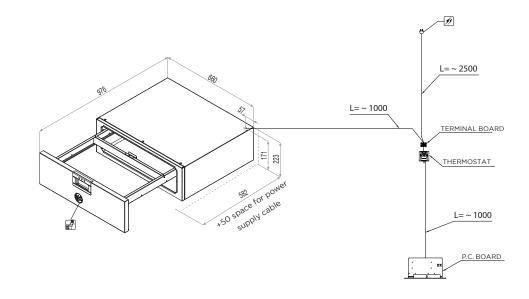

Overall dimensions (W x D x H) - mm	660 x 582 x 223h	Trays capacity	1 GN 1/1
Power supply	AC 220-240V 50/60Hz	Containers max height [mm]	150
Total input [kW]	0,7 (230V)	Product max capacity [Kg]	6
Amps. [A]	3,1 (230V)	Net weight [Kg]	31
Working temperature [°C]	30 ÷ 120	'	

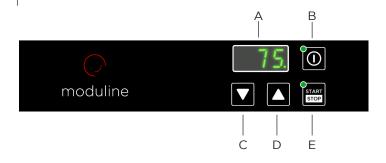

- A Display
- B ON/OFF switch
- C Temperature decrease key
- D Temperature increase key
- E START/STOP key