

REThERM RRFF40E

Regeneration oven
to reheat refrigerated
food (+3°C)

CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Internal AISI 304 18/10 stainless steel bumpers for trolley's introduction
- Total thermic insulation with rock or glass wool
- Long lasting front seals made up of food grade of high heat resistance
- Ventilated heating provided by high efficiency protected heating elements
- Door fitted with three point locking system
- Easy access to facilitate maintenance and repair

FUNCTIONAL FEATURES

- Electronic control panel of temperature, time and humidity with LCD touch-screen
- End-of-cycle buzzer
- Simplified, user-friendly control
- Automatic control of the humidity's percentage in the chamber, Climachef system
- Operating temperature: 30°C - 160°C
- Automatic humidity vent
- Chamber can accommodate different sized plate or tray rack transport trolleys
- Chamber with safety thermostat
- Delayed start timer
- Intelligent temperature decrease in the cavity at the end of the regenerating cycle allows a perfect warm holding

STANDARD SUPPLY


- Climachef
- USB port saving device HACCP
- Single-point core probe

OPTIONS & ACCESSORIES

- ☐ GN pans cart
- ☐ Plates cart
- ☐ Cart thermal cover
- ☐ Multipoint core probe
- ☐ Speedgrade fan speed reduction system
- ☐ External hand shower
- ☐ Needle core probe, thin
- ☐ One Touch software
- ☐ Grids
- ☐ Trays

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
 tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it



moduline

TECHNICAL INSTALLATION DIAGRAM

Electricity supply
cable inlet




Softened
water inlet



Adjustable vent
for excess
humidity



Important - Drawing and
dimensions refer to the
standard version.
They may change with the
addition of accessories
or options.

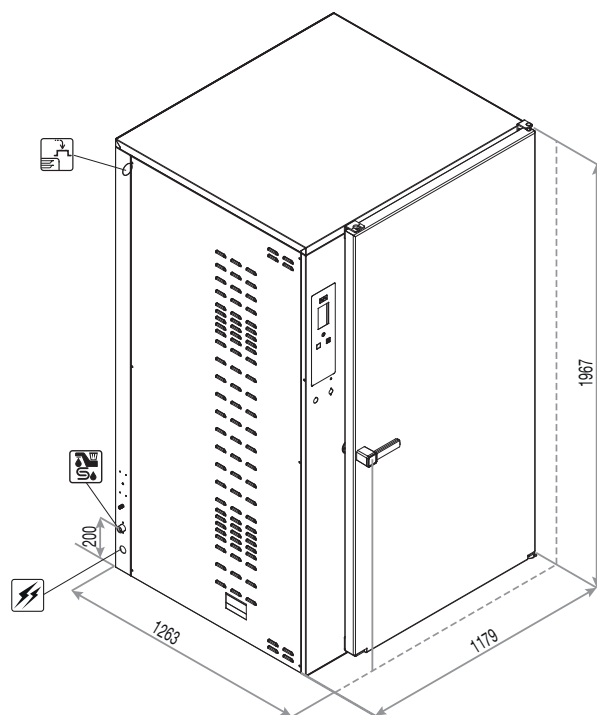

Overall dimensions
(W x D x H) - mm

1179 x 1263 x 1967h

Oven interior
(W x D x H) - mm

780 x 965 x 1860h

Trays capacity

40 x GN 1/1 h65
20 x GN 2/1 h65

Plates capacity
Plates Ø 230-310

126

Power supply

380-415V 3N 50/60Hz

Total input
[kW]

23,2 (400V)

Amps.
[A]

33,6 (400V)

Water pressure
[kPa]

150 ÷ 500

**Working
temperature [°C]**


30 ÷ 160

**Product max
capacity [Kg]**

144

Net weight
[Kg]

246

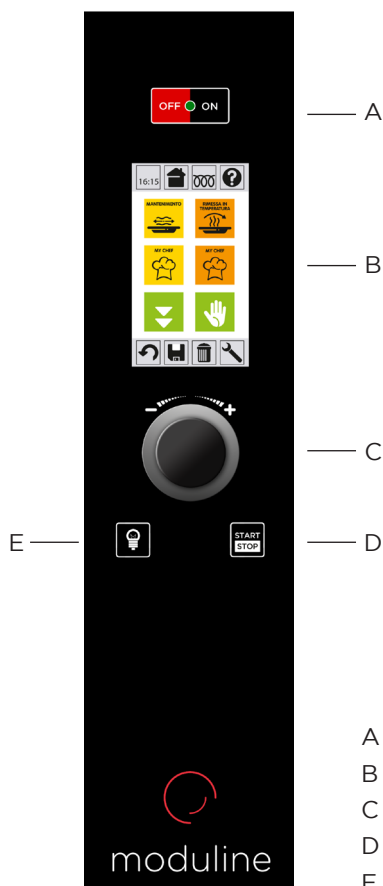

- A ON/OFF switch
- B Display
- C Setting knob and select "Enter"
- D START/STOP button
- E Chamber light button

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it