

item #	
model #	
project #	
sis#	
aia #	



RETHERM RRS040C

Regeneration oven to reheat refrigerated (+3°C) and frozen food (-18°C)

CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Total thermic insulation with rock or glass wool
- Long lasting front seal, made up of food-grade and high-heat resistant silicone, easy to clean and extremely resistant
- Removable side racks to facilitate cleaning
- Ventilated heating provided by high efficiency protected heating elements
- Snap-shut door
- Adjustable feet
- Easy access to facilitate maintenance and repair

FUNCTIONAL FEATURES

- Control panel of temperature electromechanical
- Simplified, user-friendly controls
- Operating temperature 30°C 160°C
- Humidity vent
- Periodic reversal of direction of rotation of the fan for better air distribution
- Automatic stopping of fans when is opened
- End-of-cycle buzzer
- Chamber with safety thermostat

STANDARD SUPPLY

• Removable GN 2/3 tray racks

OPTIONS & ACCESSORIES

Support
Grids



TECHNICAL INSTALLATION DIAGRAM


Overall dimensions


Electricity supply cable inlet



Vent for excess humidity



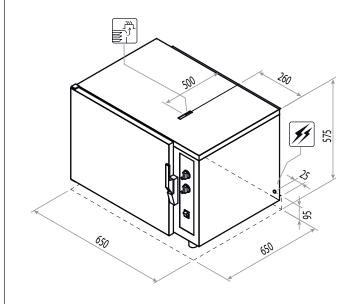

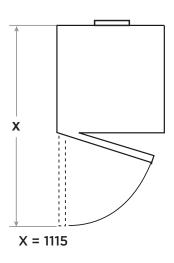

650 x 650 x 575h (W x D x H) - mm Trays capacity 4 GN 2/3 Plates capacity 4 ø 200-320 AC 220-240V 50/60Hz Power supply **Total input** В 3,45 (230V) [kW] Amps. 15 (230V) [A] Operating 30 ÷ 160 temperature [°C] Product max 9,6 capacity [Kg] Distance 95 [mm] moduline Net weight 43 [Kg]

With electromechanical control

- A On/Off switch
- B Regenerating time setting knob, with warming light indicating operation
- C Temperatureregulationknob, with warning light to show that temperature has been reached

MODULINESRL