



REThERM RRS101C

Regeneration oven
to reheat refrigerated
(+3°C) and frozen
food (-18°C)

CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Total thermic insulation with rock or glass wool
- Long lasting front seal, made up of food-grade and high-heat resistant silicone, easy to clean and extremely resistant
- Removable side racks to facilitate cleaning
- Ventilated heating provided by high efficiency protected heating elements
- Snap-shut door
- Adjustable feet
- Easy access to facilitate maintenance and repair

FUNCTIONAL FEATURES

- Control panel of temperature electromechanical
- Simplified, user-friendly controls
- Operating temperature 30°C - 160°C
- Humidity vent
- Periodic reversal of direction of rotation of the fan for better air distribution
- Automatic stopping of fans when is opened
- End-of-cycle buzzer
- Chamber with safety thermostat

STANDARD SUPPLY

- Removable GN 1/1 tray racks

OPTIONS & ACCESSORIES

- ☐ Support
- ☐ Grids
- ☐ Trays

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
 tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it





moduline

TECHNICAL INSTALLATION DIAGRAM


Electricity supply
cable inlet



Vent for excess
humidity

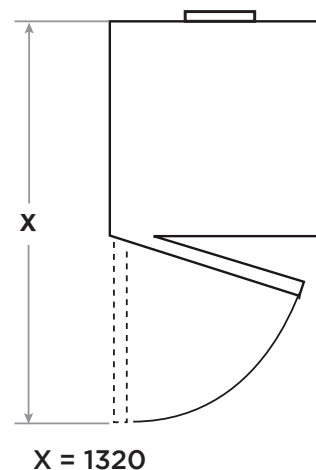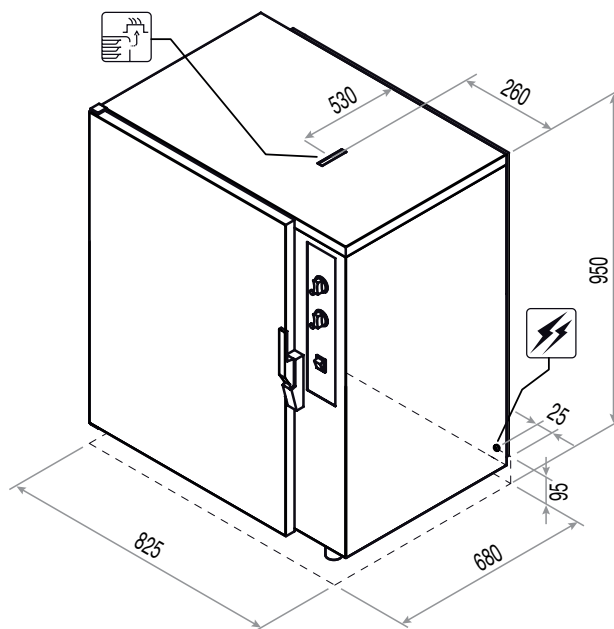

Overall dimensions (W x D x H) - mm	825 x 680 x 950h
Trays capacity	10 GN 1/1
Plates capacity	20 ø 200-260 10 ø 270-320
Power supply	380-415V 3N 50/60Hz
Total input [kW]	12,5 (400V)
Amps. [A]	18,1 (400V)
Operating temperature [°C]	30 ÷ 160
Product max capacity [Kg]	36
Distance [mm]	75
Net weight [Kg]	70

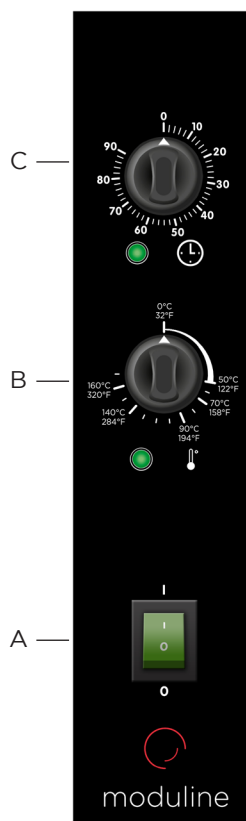

With electromechanical control

- A On/Off switch
- B Regenerating time setting knob, with warming light indicating operation
- C Temperature regulation knob, with warming light to show that temperature has been reached

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it