



## RE THERM RRT162C/D/E

Regeneration oven  
to reheat refrigerated  
food (+3°C)

### CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- All-around rubber bumpers
- Total thermic insulation with rock or glass wool
- Long lasting front seal, made up of food-grade and high-heat resistant silicone
- Double door to reduce mostly the drop in temperature at opening
- Removable side racks to facilitate cleaning
- Internal drain for easy cleaning
- Ventilated heating provided by high efficiency protected heating elements
- Snap-shut door
- Mounted on four 150mm diameter castors, two of which with brake
- Ergonomic handles for pushing and guiding
- Easy access to facilitate maintenance and repair

### FUNCTIONAL FEATURES

- Control panel of temperature, time and humidity. Electromechanical (C), electronic with digital display (D) or electronic with LCD touch-screen (E)
- Simplified, user-friendly controls
- Operating temperature 30°C ÷ 160°C
- Intelligent temperature decrease in the cavity at the end of the regenerating cycle allows a perfect warm holding (only for D and E versions)
- Manual humidity vent
- Periodic reversal of direction of rotation of the fans for better air distribution
- Concealed water storage tank
- End-of-cycle buzzer
- Chamber with safety thermostat
- Delayed start timer (only for D and E versions)

### STANDARD SUPPLY

- Removable GN 2/1 tray racks

### OPTIONS & ACCESSORIES

- Single-point core probe (only for D and E versions)
- Automatic humidity vent (Climachef - only for D and E versions)
- Multipoint core probe (only for D and E versions)
- Speedgrade fan speed reduction system (only for D and E versions)
- USB port saving device HACCP (only for D and E versions)
- Trays
- Grids
- Needle core probe (only for D and E versions)
- One Touch software
- Opposite side opening
- Glass door and lighting

**MODULINESRL**



# moduline

## TECHNICAL INSTALLATION DIAGRAM


Electricity supply  
cable inlet

Adjustable vent for  
excess humidity

Chamber drain  
and condensation  
drain tray

Softened  
water tank

**Important** - Drawing and  
dimensions refer to the  
standard version.  
They may change with the  
addition of accessories  
or options.

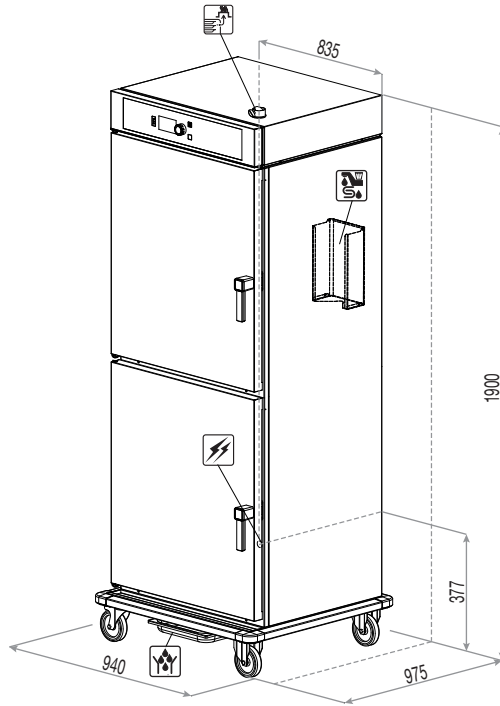

**Overall dimensions**  
(W x D x H) - mm

940 x 975 x 1900h

**Trays capacity**

16 x GN 2/1

**Distance**  
[mm]

79

**Plates capacity**

64 ø 200-260  
32 ø 270-320

**Power supply**

380-415V 3N 50/60Hz

**Working  
temperature [°C]**

30 ÷ 160

**Product max  
capacity [Kg]**

115

**Total input  
[kW]**


10,15 (400V)

**Amps.  
[A]**

14,7 (400V)


**Net weight  
[Kg]**

170

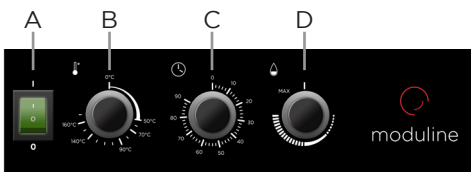


### C Version

- A ON/OFF switch
- B Cavity temperature knob
- C Time setting knob
- D Cavity humidity control knob

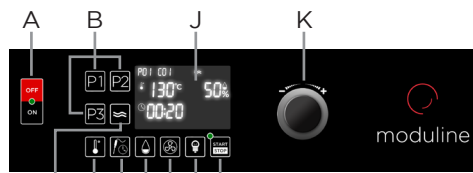

### D Version

- A ON/OFF switch
- B Pre-set program keys
- C Holding function key
- D Cavity temperature control key
- E Time / core probe control key
- F Cavity humidity control key
- G Fan speed control key (optional)
- H Cavity light key
- I Start/stop key
- J Display
- K Encoder knob

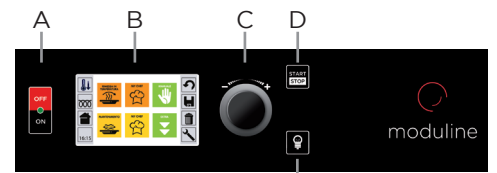

### E Version

- A ON/OFF switch
- B Display Touch Screen
- C Setting knob and select "ENTER"
- D "START/STOP" button
- E Chamber light button

**MODULINESRL**

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY  
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it