



COOK&HOLD CHC282E

Static low temperature
 oven

CONSTRUCTION FEATURES

- Entirely built in steel AISI304
- Two separately controlled compartments with radiused corners
- Total thermic insulation with rock or glass wool
- Long lasting frontal seals made up of food grade of high heat resistance
- Static heating provided by low consumption wire heating element that coils up all the chamber
- Snap-shut door
- Four wheels, two of which with brake
- All-around rubber bumpers
- Full-width stainless steel front handle
- Internal and removable cooking juices collection tray, with ball valve discharging valve

FUNCTIONAL FEATURES

- Electronic control panel of temperature, time, core probe and Δt with LCD 4,3" touch-screen
- Operating temperature 30°C ÷ 160°C
- End-of-cycle buzzer
- Chamber with safety thermostat
- Start timer programmed

STANDARD SUPPLY

- Multipoint core probe with the possibility to register 30 different temperatures and save them in the HACCP report
- Glazed doors plus lighting
- Removable GN2/1 and GN1/1 tray racks
- USB port saving device HACCP


OPTIONS & ACCESSORIES

- Left hinged door
- Grids
- Trays
- UK plug




moduline


TECHNICAL INSTALLATION DIAGRAM

Electricity supply
cable inlet 

Important - Drawing and
dimensions refer to the
standard version.
They may change with the
addition of accessories or
options.

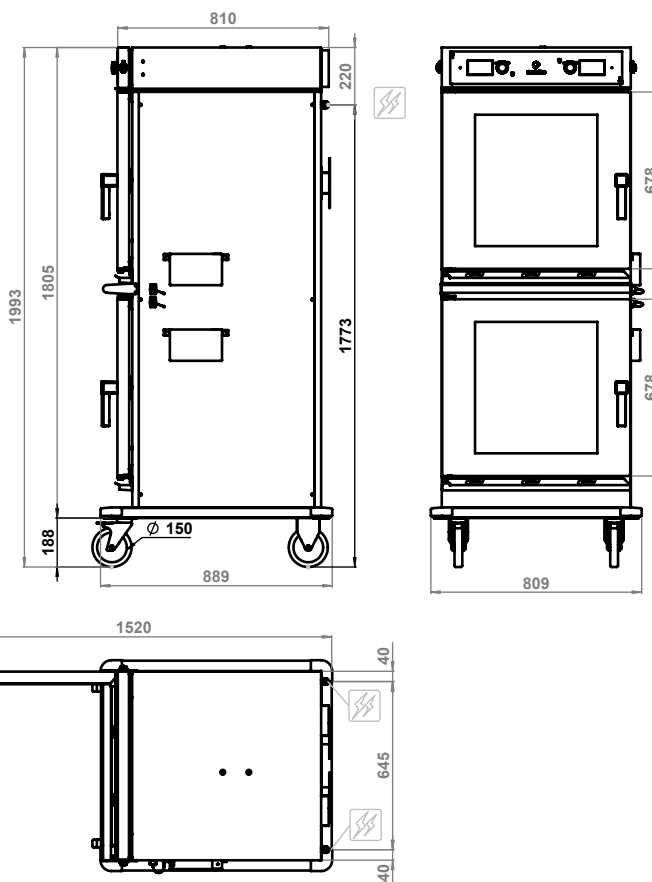

Overall dimensions (W x D x H) - mm	809 x 889 x 1993h
Power supply	2 x AC 220-240V 50/60 Hz
Total input [Kw]	2,8 + 2,8 (230V)
Amps. [A]	12,2 + 12,2 (230V)
Working temperature [°C]	30 + 160
Containers capacity - distance [mm]	7 + 7 x GN 2/1 - (75) 14 + 14 x GN 1/1 - (75)
Product max capacity [Kg]	55 + 55
Net weight [Kg]	164

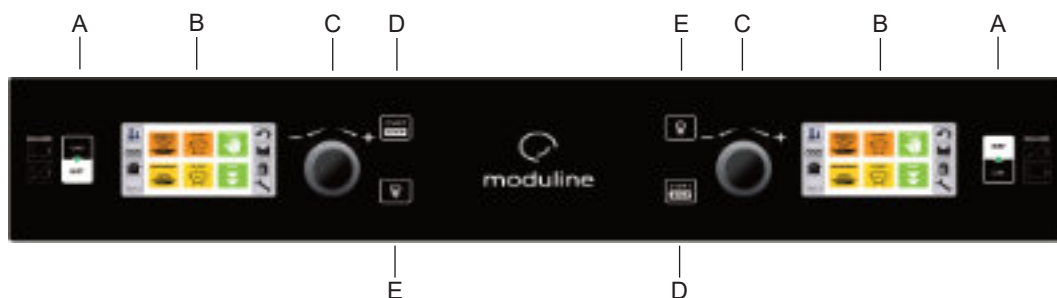

- A ON/OFF switch
- B Display Touch Screen
- C Setting knob
and select "ENTER"
- D "START/STOP" button
- E Chamber light button

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it