



COOK & HOLD CHT082E

Static low temperature
 oven

CONSTRUCTION FEATURES

- Tightness chamber with radiuses corners
- All-around rubber bumpers
- Total thermic insulation with rock or glass wool
- Long lasting front seal, made up of food-grade and high-heat resistant silicone
- Removable side racks to facilitate cleaning
- Static heating provided by low consumption wire heating element that coils up all the chamber
- Ergonomic and fully built-in door handle with magnetic closure
- Four swivel wheels of which 2 with brake
- Ergonomic handle for pushing and guiding
- Easy access to facilitate maintenance and repair

FUNCTIONAL FEATURES

- Control panel with electronic time, temperature and heart probe regulation
- Operating temperature 30° ÷ 120°C
- Adjustable humidity vents on the door
- Chamber with safety thermostat
- Manual keyboard lock
- End of cycle buzzer

STANDARD SUPPLY

- Removable GN 2/1 and GN 1/1 tray racks
- Internal core probe

OPTIONS & ACCESSORIES

- ☐ Kit feet
- ☐ Grids
- ☐ Trays
- ☐ Opposite side opening
- ☐ UK plug

MODULINESRL

TECHNICAL INSTALLATION DIA- GRAM




Electricity supply
cable inlet



Vent for excess
humidity



Important - Drawing and
dimensions refer to the
standard version.
They may change with the
addition of accessories
or options.

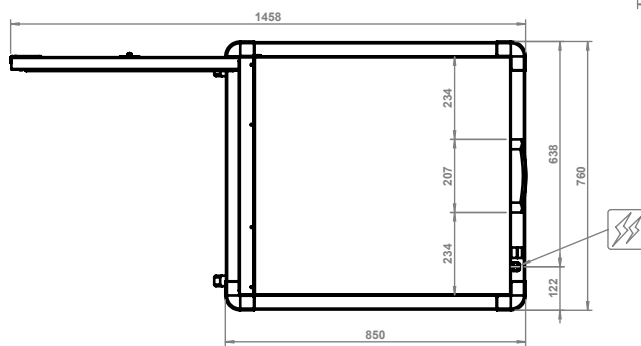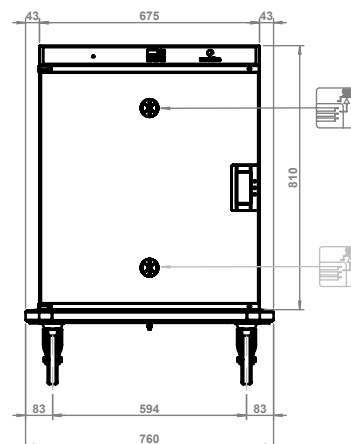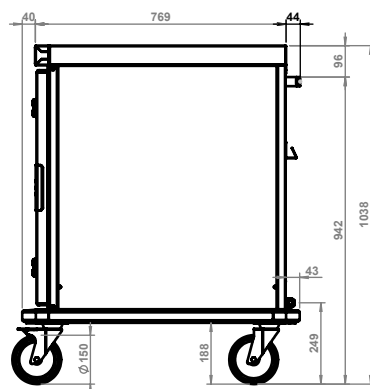

Overall dimensions
(W x D x H) - mm

760 x 850 x 1038h

Total input
[kW]

1,5 (230V)

Trays capacity -
distance [mm]

8 x GN 2/1 - (75)
16 x GN 1/1 - (75)

Amps.
[A]

6,6 (230V)

Tray max. height GN
2/1 [mm]

8 x 65 (h)
3 x 150 (h)
2 x 200 (h) + 2 x 65 (h)

Working temperature
[°C]

30 ÷ 120

Tray max. height GN
1/1 [mm]

16 x 65 (h)
6 x 150 (h)
4 x 200 (h) + 4 x 65 (h)

Product max capacity
[Kg]


40

Power supply

AC 220-240V 50/60Hz

Net weight
[Kg]

62

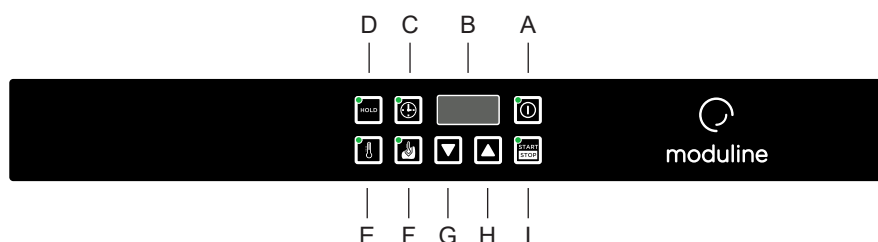

- A ON/OFF switch
- B Display
- C Time selection key
- D Keeping warm key
- E Temperature selection key
- F Core probe on/off key
- G Temperature decrease key
- H Temperature increase key
- I START/STOP key

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it