

item # .....  
model # .....  
project # .....  
sis # .....  
aia # .....



## COOK&HOLD CSD002ER

Static low temperature  
with drawers, built-in  
and remote controls

### CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Total thermic insulation with rock or glass wool
- Long lasting drawers seals made up of food grade of high heat resistance
- Static heating provided by low consumption wire heating element that coils up all the chamber
- Ergonomic and fully built-in drawers handle with magnetic closure
- Built-in version with remote controls

### FUNCTIONAL FEATURES

- Electronic control of the time, temperature and core probe
- Operating temperature 30° ÷ 120°C
- **Adjustable moisture vent on the drawer**
- Chamber with safety thermostat
- Manual keyboard lock

### STANDARD SUPPLY

- Removable GN1/1 tray racks
- Internal core probe

### OPTIONS & ACCESSORIES

- Grids
- Trays
- UK plug


MODULINESRL


Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY  
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it




# moduline

## TECHNICAL INSTALLATION DIAGRAM

Electricity supply  
cable inlet 

Humidity  
exhaustion vent 

Important - Drawing and  
dimensions refer to the  
standard version.  
They may change with  
the addition of  
accessories or options.

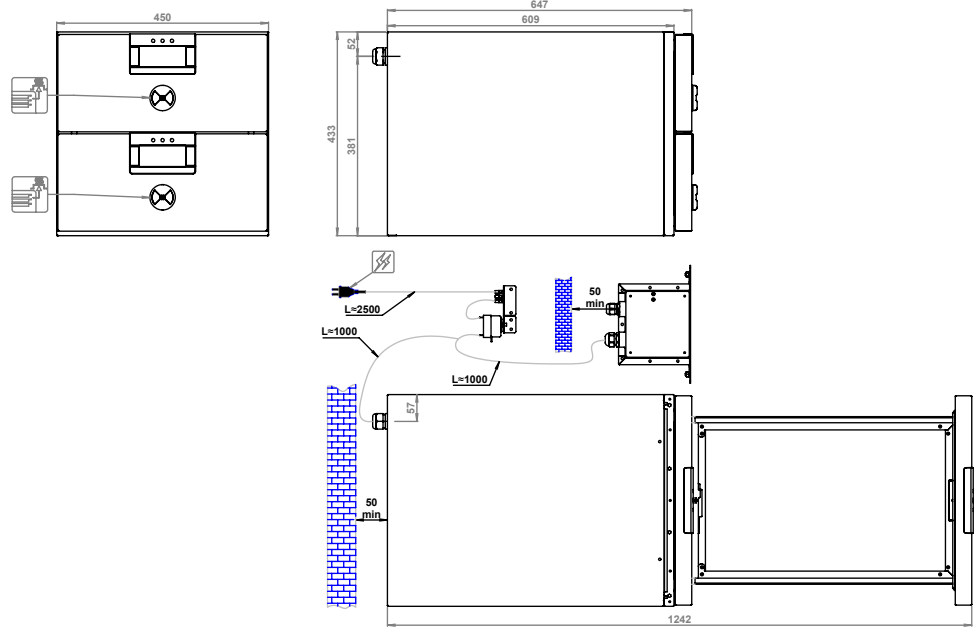

Overall dimensions  
(W x D x H) - mm

450 x 647 x 433h

Power supply

AC 220-240V 50/60Hz

Total input  
[kW]

1 (230V)

Amps.  
[A]

4,4 (230V)

Working  
temperature [°C]

30 ÷ 120

Trays capacity

2 GN 1/1

Containers max  
height [mm]


150

Product max  
capacity [Kg]

12

Net weight  
[Kg]

40

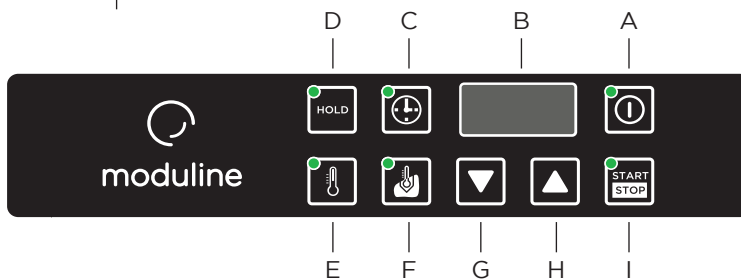

- A ON/OFF switch
- B Display
- C Time selection key
- D Keeping warm key
- E Temperature selection key
- F Core probe on/off key
- G Temperature decrease key
- H Temperature increase key
- I START/STOP key

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY  
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it