



PRESSURE CVE031E Pressure steamer

CONSTRUCTION FEATURES

- Oven interior and boiler in AISI 316 stainless steel
- Total thermal insulation with ceramic fiber
- Long lasting seal made up of food grade of high heat resistance
- Removable side racks to facilitate cleaning
- Internal drain for easy cleaning
- Adjustable feet
- Easy access to facilitate maintenance and repair
- Condensation drain drawer under the door

FUNCTIONAL FEATURES

- Electronic control panel of temperature, time and internal core probe with LCD 4,3" touch-screen
- Operating temperature 50°C-122°C - (1,2 bar max)
- End-of-cycle buzzer
- Safety thermostat boiler
- Delayed start timer
- Pressure control of the chamber and boiler with electronic pressure control devices
- Preheating chamber
- Automatic and programmable boiler cleaning system
- Electronic boiler power control
- Automatic door opening and closing system
- Automatic cavity vacuum reducing system

STANDARD SUPPLY

- Removable GN1/1 tray racks
- Internal core probe of chamber
- Boiler descaling system
- USB port saving device HACCP

OPTIONS & ACCESSORIES

- | | |
|--|--|
| <input type="checkbox"/> Pastorisation/sterilisation kit | <input type="checkbox"/> Available side racks |
| <input type="checkbox"/> Supports | <input type="checkbox"/> Water filter system |
| <input type="checkbox"/> Grids | <input type="checkbox"/> Boiler descaling |
| <input type="checkbox"/> Trays | <input type="checkbox"/> Drainage depressurization kit |
| | <input type="checkbox"/> Support base |

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
 tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it




moduline


TECHNICAL INSTALLATION DIA- GRAM

- Electricity supply cable inlet 
- Chamber drain 
- Softened water inlet 
- Water inlet 

Important - Drawing and dimensions refer to the standard version. They may change with the addition of accessories or options.

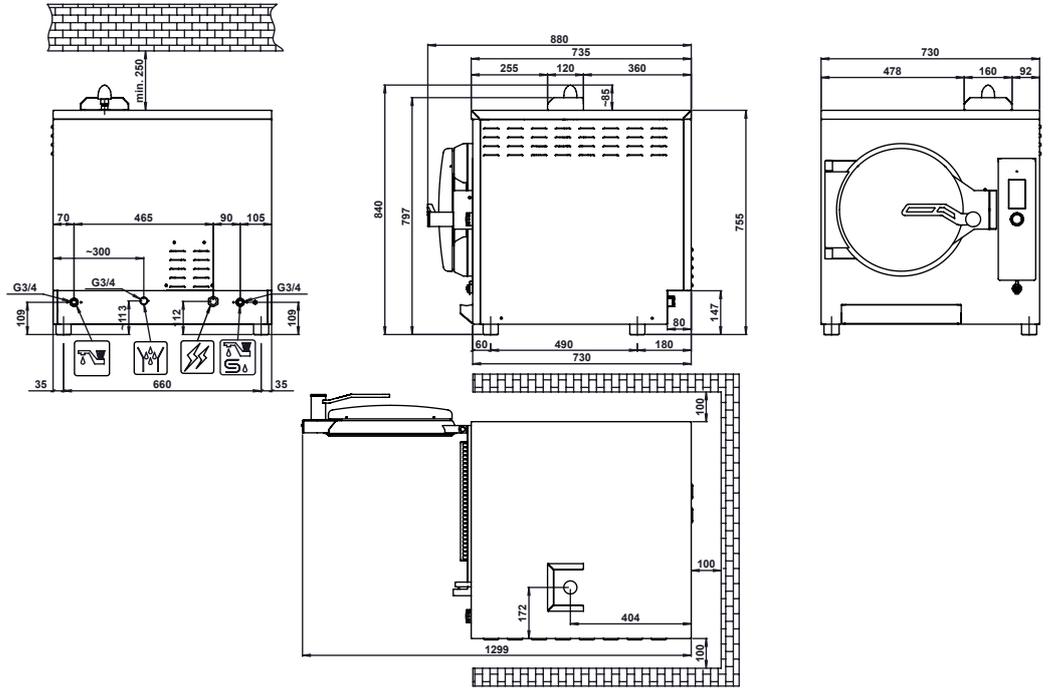

Overall dimensions (W x D x H) - mm	730 x 880 x 840h
Trays capacity	3 x GN 1/1 (80h)
Power supply	3N 400V 50/60Hz
Totale input [kW]	15,5
Amps [A]	22,4
Working temperature [°C]	50 + 122
Net weight [Kg]	110

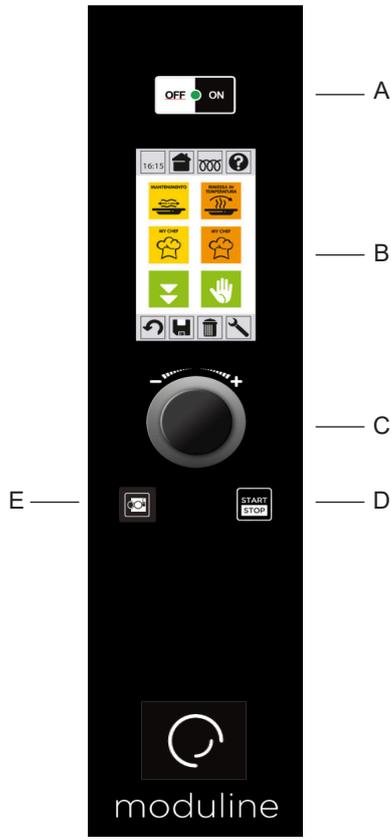

- A ON/OFF switch
- B Display
- C Setting knob and select "Enter"
- D START/STOP key
- E Door opening button

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
 tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it