



item #
 model #
 project #
 sis #
 aia #



SMOKER FAB052E

Static oven with external
smoking device

CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Total thermic insulation with rock or glass wool
- Long lasting frontal seals made up of food grade of high heat resistance
- Static heating provided by low consumption wire heating element that coils up all the chamber
- Snap-shut door
- Tightness cavity with radiused corners, built-in drip tray and drainage system

FUNCTIONAL FEATURES

- Electronic control panel of temperature, time, core probe, Δt and smoking with LCD 4.3" touch-screen
- Operating temperature 30°C – 160°C
- End-of-cycle buzzer
- Chamber with safety thermostat
- Internal drain for easy cleaning
- Condensation drip tray
- Start timer programmed

STANDARD SUPPLY

- Multipoint core probe with the possibility to register 30 different temperatures and save them in the HACCP report
- Glazed door plus lighting
- Removable GN 2/1 and GN 1/1 tray racks
- External stainless steel smoke generator with ash tray
- USB port saving device HACCP

OPTIONS & ACCESSORIES

- | | | |
|--|---|---|
| <input type="checkbox"/> EcoWash cleaning system | <input type="checkbox"/> Trays | <input type="checkbox"/> Bag of wooden chips |
| <input type="checkbox"/> Opposite side opening | <input type="checkbox"/> Water filter system
(together with washing) | <input type="checkbox"/> Detergent/Rinsing agent
(together with washing) |
| <input type="checkbox"/> Grids | <input type="checkbox"/> Hooks kit | <input type="checkbox"/> Supports |

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
 tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it



moduline


TECHNICAL INSTALLATION DIAGRAM

Electricity supply
cable inlet 

Smoke exhaustion
vent 

Chamber drain 

Important - Drawing and
dimensions refer to the
standard version.
They may change with the
addition of accessories
or options.

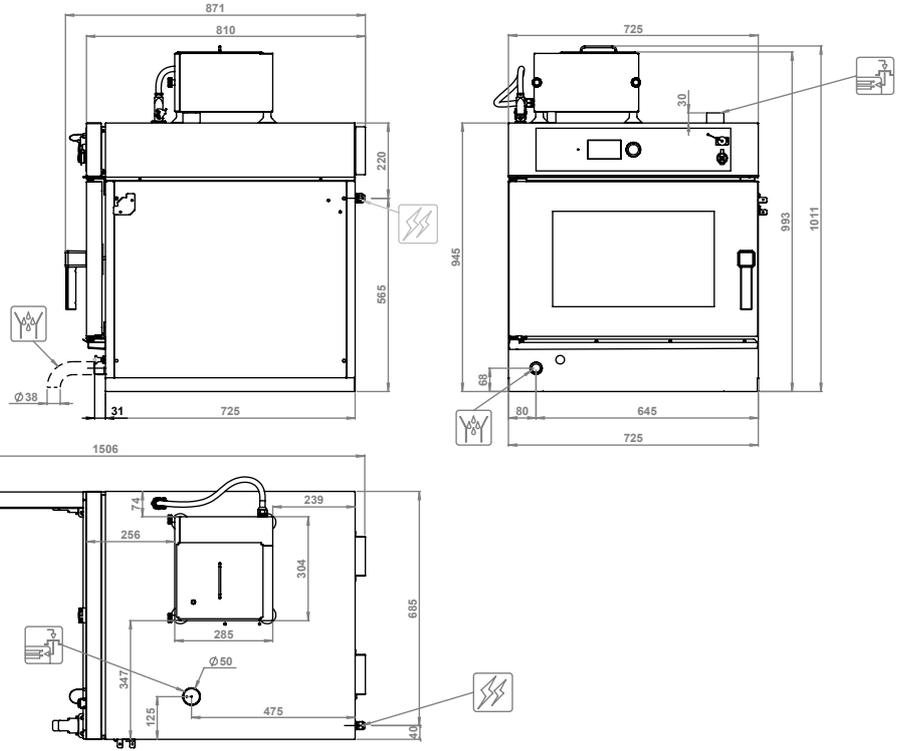

Overall dimensions
(W x D x H) - mm 725 x 810 x 1011h

Power supply AC 220-240V 50/60Hz

Total input
[kW] 3,15 (230V)


Amps.
[A] 13,7 (230V)

Working temperature
[°C] 30 + 160

Trays capacity -
distance [mm] 5 x GN 2/1 - (75)
10 x GN 1/1 - (75)

Product max capacity
[Kg] 46

Net weight
[Kg] 87

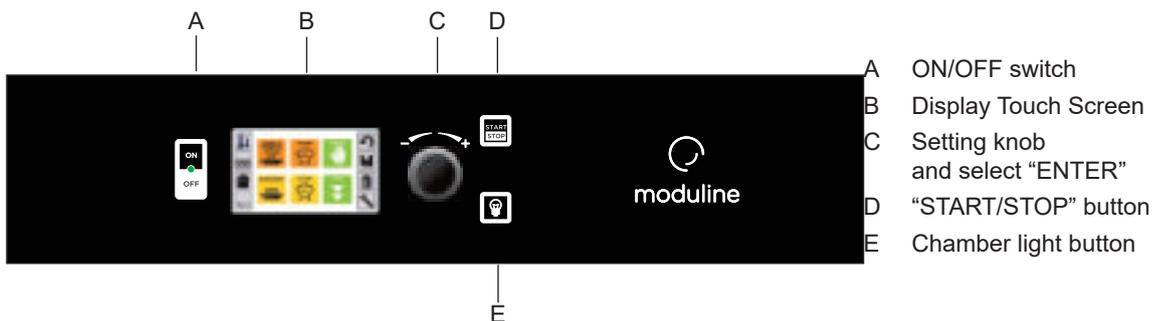

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it