



# SMOKER FAB082E

Static oven with external  
smoking device

### CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Total thermic insulation with rock or glass wool
- Long lasting frontal seals made up of food grade of high heat resistance
- Static heating provided by low consumption wire heating element that coils up all the chamber
- Snap-shut door
- Tightness cavity with radiused corners, built-in drip tray and drainage system

### FUNCTIONAL FEATURES

- Electronic control panel of temperature, time, core probe, Dt and smoking with LCD 4,3" touch-screen
- Operating temperature 30°C – 160°C
- End-of-cycle buzzer
- Chamber with safety thermostat
- Internal drain for easy cleaning
- Condensation drip tray
- Start timer programmed

### STANDARD SUPPLY

- Multipoint core probe with the possibility to register 30 different temperatures and save them in the HACCP report
- Glazed door plus lighting
- Removable GN 2/1 and GN 1/1 tray racks
- External stainless steel smoke generator with ash tray
- USB port saving device HACCP

### OPTIONS & ACCESSORIES

- |  |   |   |
|--|---|---|
| <input type="checkbox"/> EcoWash cleaning system | <input type="checkbox"/> Trays  | <input type="checkbox"/> Bag of wooden chips                                |
| <input type="checkbox"/> Opposite side opening   | <input type="checkbox"/> Water filter system<br>(together with washing) | <input type="checkbox"/> Detergent/Rinsing agent<br>(together with washing) |
| <input type="checkbox"/> Grids                   | <input type="checkbox"/> Hooks kit                                      | <input type="checkbox"/> Supports   |
| <input type="checkbox"/> UK plug                 |   |   |

### MODULINESRL



# moduline


## TECHNICAL INSTALLATION DIAGRAM

Electricity supply  
cable inlet

Smoke exhaustion  
vent

Chamber drain

**Important** - Drawing and  
dimensions refer to the  
standard version.  
They may change with the  
addition of accessories  
or options.

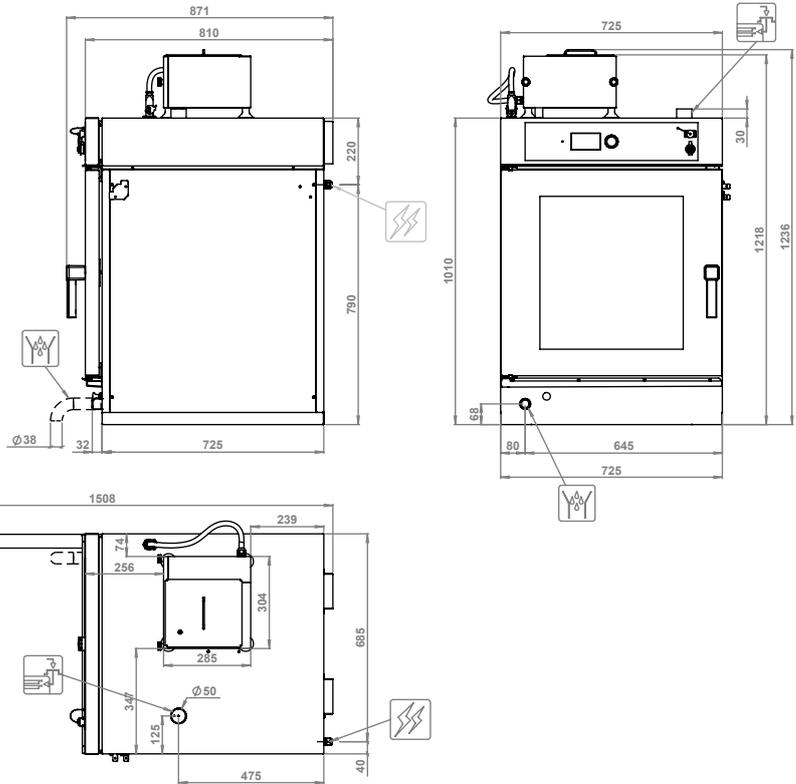

Overall dimensions  
(W x D x H) - mm

725 x 810 x 1236h

Power supply

AC 220-240V 50/60Hz

Total input  
[kW]

2,95 (230V)

Amps.  
[A]

12,9 (230V)

Working temperature  
[°C]

30 + 160

Trays capacity -  
distance [mm]


8 x GN 2/1 - (75)  
16 x GN 1/1 - (75)

Product max capacity  
[Kg]

55

Net weight  
[Kg]

110

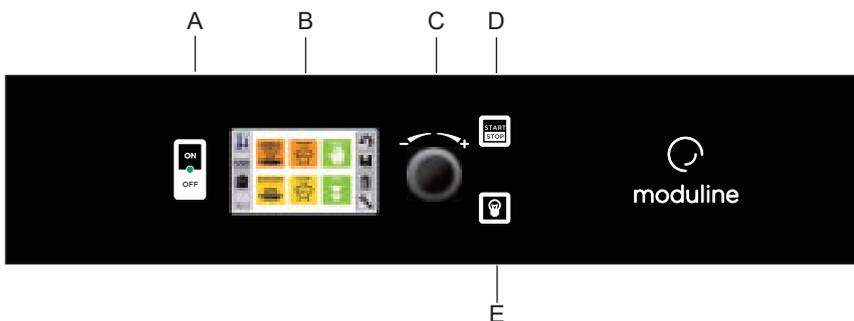

- A ON/OFF switch
- B Display Touch Screen
- C Setting knob and select "ENTER"
- D "START/STOP" button
- E Chamber light button

## MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY  
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it