



**HOLD  
 HCT122E**  
 Ventilated cold holding  
 cabinet

**CONSTRUCTION  
 FEATURES**

- Chamber with radiused corners and removable side racks to facilitate cleaning
- All-around rubber bumpers
- Highly efficient and thick insulation, casing injected with CFC-free polyurethane foam
- Ergonomic and fully built-in door handles with magnetic closure
- Cooling process through monobloc cooling unit with evaporator
- Environmentally sustainable monobloc cooling unit with gas R290
- Four swivel wheels of which two with brake
- Ergonomic handles for pushing and guiding
- Easy access to facilitate maintenance and repair

**FUNCTIONAL  
 FEATURES**

- Electronic temperature control with defrosting programme
- Simplified, user-friendly controls
- Operating temperature 0°C / +10°C

**STANDARD  
 SUPPLY**

- Removable GN2/1 and GN1/1 tray racks

**OPTIONS &  
 ACCESSORIES**

- Grids
- Trays
- Digital control with wi-fi


**MODULINESRL**



moduline

TECHNICAL  
INSTALLATION  
DIAGRAM

Electricity supply  
cable inlet

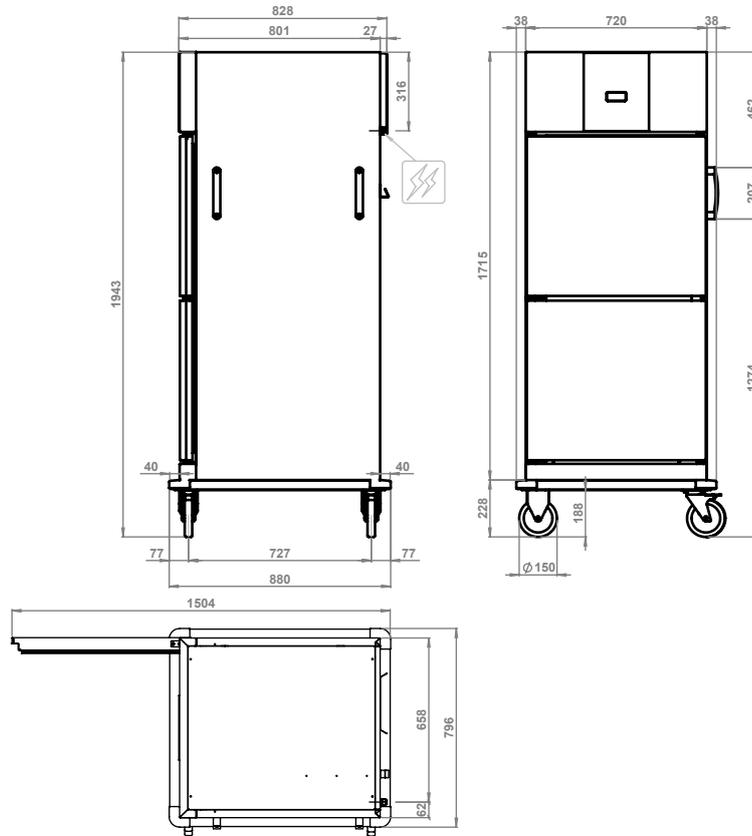

Overall dimensions  
(W x D x H) - mm

796 x 880 x 1943h

Trays capacity

12 x GN 2/1  
24 x GN 1/1

Distance  
[mm]

68

Plates capacity

48 ø 200-260  
24 ø 270-320

Power supply

AC 220-240V 50/60Hz

Climate class

5

Power  
[kW]

0,2

Amps.  
[A]

1,5

Cooling capacity  
[W]

430

Working temperature  
[°C]

0 ÷ 10

Product max capacity  
[Kg]

72

Net weight  
[Kg]

120



- A SET key / keyboard unlock
- B Main switch
- C Temperature decrease key
- D Temperature increase key
- E Display

**MODULINESRL**

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY  
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it