



item #
 model #
 project #
 sis #
 aia #

HOLD - WARM HHA101EV Ventilated Hot Holding Trolley

CONSTRUCTION

- Stainless steel chamber
- Rubber perimeter anti-shock bumpers
- Thermal insulation of the chamber with 40 mm thickness
- Removable tray runners for easy cleaning operations
- Ventilated heating of the cavity by armored electric resistance
- Special air distribution system Throughout the whole cavity with heat conveyor
- Manually fillable stainless-steel tray with water, useful for the moisture formation during the holding cycle
- Ergonomic and fully recessed door handle
- 270° door opening with magnetic lock
- Silicone rubber door gasket resistant to heat and aging
- Four swivel wheels, 2 of which with brake
- Ergonomic handles placed on the back side for pushing and comfortable driving in the premises
- Schuko plug with 2 meters power cord and side cable winder
- Extractible dashboard to facilitate cleaning of the cavity and maintenance (heating unit included)
- Wiring and functional components placed to facilitate any maintenance

FUNCTIONAL FEATURES

- Electronic control with "touch screen" digital display for electronic temperature adjustment
- Digital temperature display of the cavity
- Automatic keyboard lock
- Operating temperature 30°C ÷ 90°C
- Adjustable moisture evacuation vents on the door
- Cavity safety thermostat
- Automatic stop of heating of the resistor while door opening

STANDARD EQUIPMENT

- Removable tray runners 10 GN1/1

ACCESSORIES/ OPTIONS ON REQUEST

- Grids
- Trays
- Adjustable feet set
- Removable tray runners 8 GN1/1
- Digital control with wi-fi
- Eutectic plates for cold food holding
- Black Edition, which includes: a) Plexiglass aesthetic details (sides and back panels); b)Magnetic door hold position (Lx side); c) Ergonomic 40 cm handle; d) Power cord reel with Moduline logo.



MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
 tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it




moduline


INSTALLATION
TECHNICAL DIAGRAMS



Important - Drawing and dimensions refer to the standard version. They may change with the addition of accessories or options.

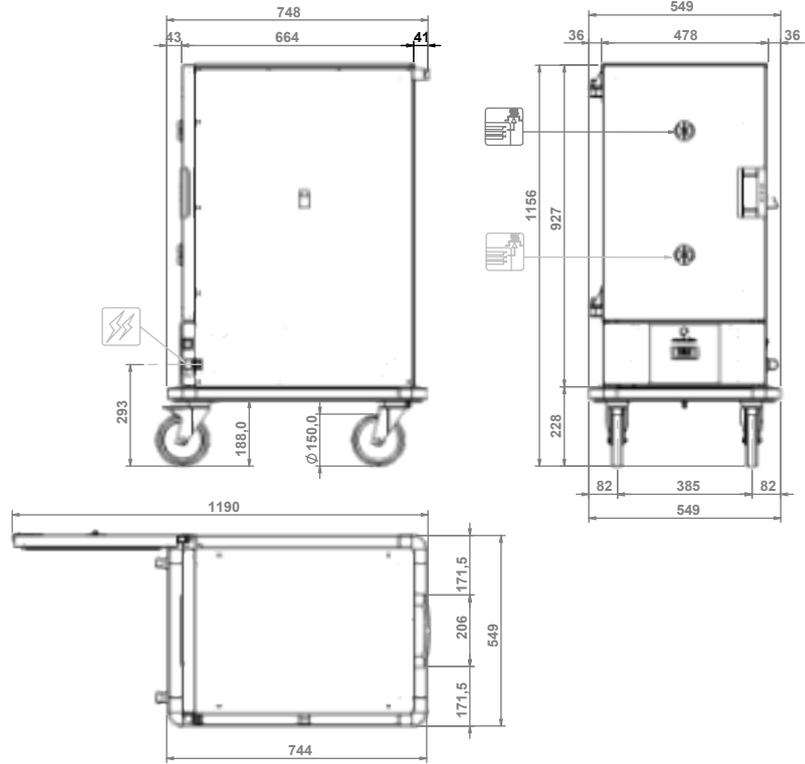

Dimensions (W x D x H) - mm	549 x 748 x 1156 h	Absorption [A]	10 (230V)
Cavity dimensions (W x D x H) - mm	385 x 540 x 670 h	Operating Temperature [°C]	30 ÷ 90
Tray capacity - Tray pitch [mm]	10 x GN 1/1 - (60)	Product Maximum capacity [Kg]	24
Trays Maximum height [mm]	10 x 40 (h) 5 x 100 (h) 3 x 150 (h)	Net weight [Kg]	90
Power supply	AC 220-240V 50/60Hz		
Total power absorbed [kW]	2,3 (230V)		

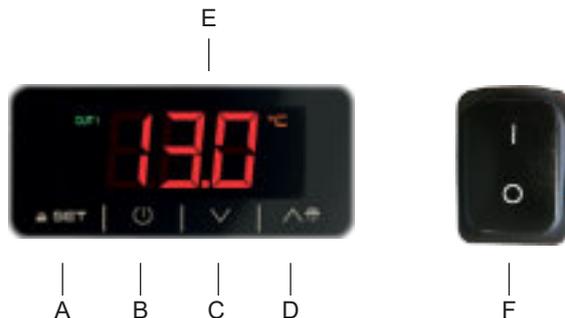

- A SET key / keyboard unlock
- B Non-operational key (Disabled)
- C Temperature decrease key
- D Temperature increase key
- E Display
- F Main switch

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it