



item # .....  
model # .....  
project # .....  
sis # .....  
aia # .....



# HOLD HHT161EP

Warm holding cabinet

## CONSTRUCTION FEATURES

- Tightness chamber with radiuses corners
- All-around rubber bumpers
- Total thermic insulation with rock or glass wood
- Long lasting front seal, made up of food-grade and high-heat resistant silicone
- Removable side racks to facilitate cleaning
- Static heating provided by low consumption wire heating element that coils up all the chamber DELIWARM®
- Ergonomic and fully built-in door handle with magnetic closure
- Four swivel wheels of which 2 with brake
- Ergonomic handle for pushing and guiding
- Easy access to facilitate maintenance and repair
- Pass-through cavity, front and rear door

## FUNCTIONAL FEATURES

- Electronic control of the temperature
- Operating temperature 30° ÷ 120°C
- Adjustable humidity vents on the door
- Chamber with safety thermostat
- Manual keyboard lock


## STANDARD SUPPLY

- Removable GN 1/1 tray racks



## OPTIONS & ACCESSORIES

- Kit feet
- Grids
- Trays
- Opposite side opening
- UK plug
- Digital control with wi-fi

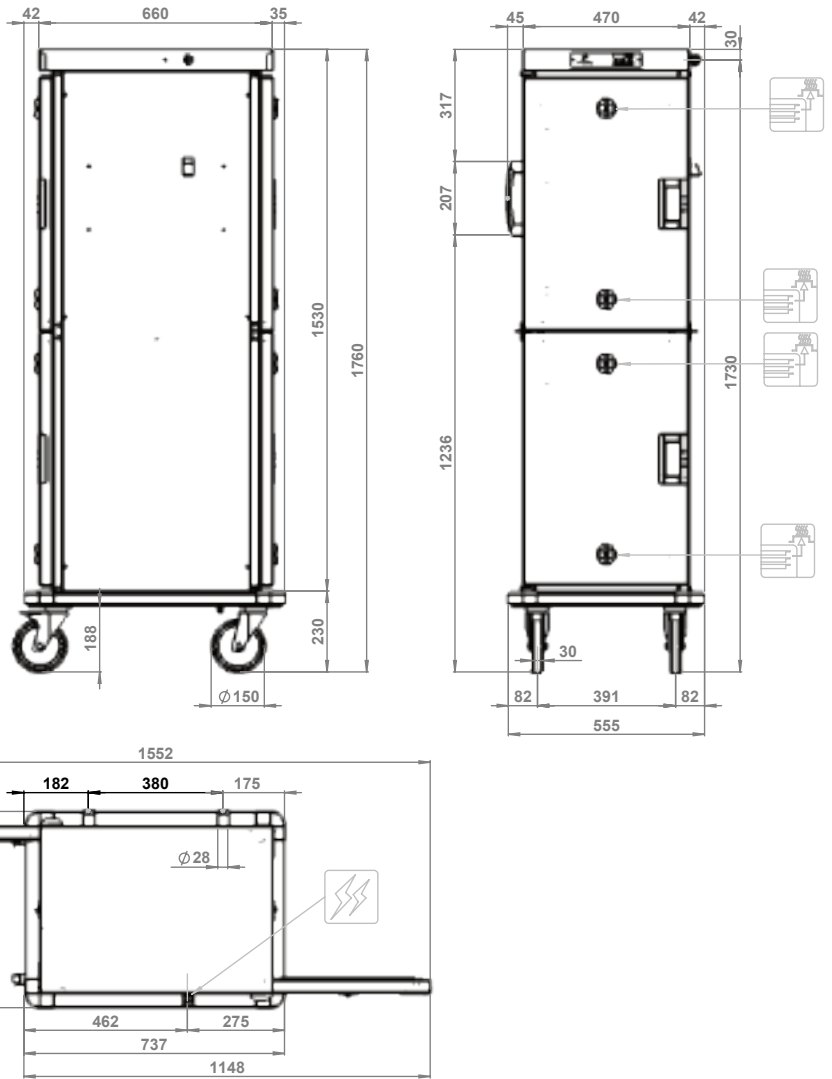MODULINESRL




**TECHNICAL  
INSTALLATION  
DIAGRAM**

- Electricity supply cable inlet 
- Vent for excess humidity 

Important - Drawing and dimensions refer to the standard version. They may change with the addition of accessories or options.

<b>Overall dimensions (W x D x H) - mm</b>	555 x 737 x 1760 h	<b>Amps. [A]</b>	8,7 (230V)
<b>Trays capacity - distance [mm]</b>	16 x GN 1/1 - (75)	<b>Working temperature [°C]</b>	30 ÷ 120
<b>Tray max. height [mm]</b>	16 x 65 (h) 6 x 150 (h) 4 x 200 (h) + 4 x 65 (h)	<b>Product max capacity [Kg]</b>	58
<b>Power supply</b>	AC 220-240V 50/60Hz	<b>Net weight [Kg]</b>	88
<b>Total input [kW]</b>	2 (230V)		

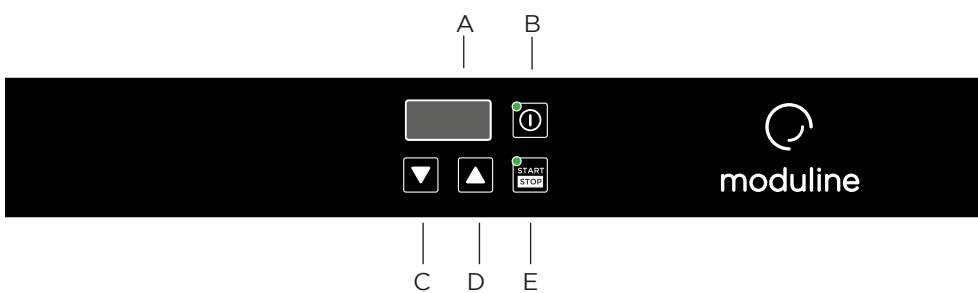

- A Display
- B ON/OFF switch
- C Temperature decrease key
- D Temperature increase key
- E START/STOP key

MODULINESRL