



item #
 model #
 project #
 sis #
 aia #



HOLD
HHT162K
 Warm holding cabinet

**CONSTRUCTION
 FEATURES**

- Tightness chamber with radiuses corners
- All-around rubber bumpers
- Total thermic insulation with rock or glass wood
- Long lasting front seal, made up of food-grade and high-heat resistant silicone
- Removable side racks to facilitate cleaning
- Static heating provided by low consumption wire heating element that coils up all the chamber
- Ergonomic and fully built-in door handle with magnetic closure
- Four swivel wheels of which 2 with brake
- Ergonomic handle for pushing and guiding
- Easy access to facilitate maintenance and repair

**FUNCTIONAL
 FEATURES**

- Electronic capacitive control, temperature, holding cycle, programs, holding by probe
- Operating temperature 30°-120°C
- Adjustable humidity vents on the door
- Chamber with safety thermostat
- Manual keyboard lock
- Automatic Holding Cycle (*only with Core Probe option)

**STANDARD
 SUPPLY**

- Removable GN 2/1 tray racks

**OPTIONS
 & ACCESSORIES**

- Core Probe
- Feet kit
- Grids
- Trays
- Opposite side opening
- WiFi

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
 tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it

TECHNICAL INSTALLATION DIAGRAM




Electricity supply
cable inlet



Adjustable vent for
release of excess
humidity



Important - Drawing and
dimensions refer to the
standard version.
They may change with the
addition of accessories or
options.

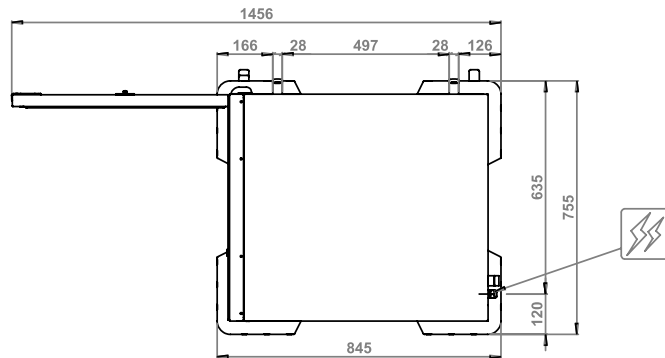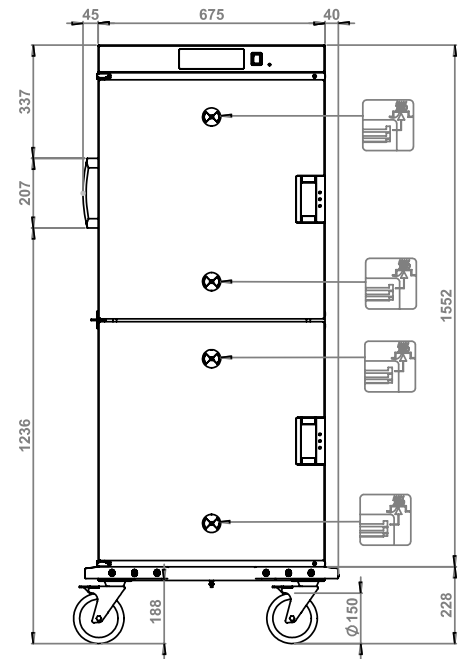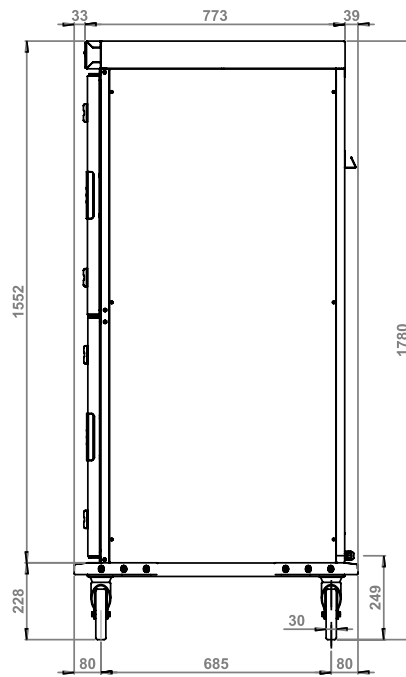

Overall dimensions
(W x D x H) - mm

760 x 850 x 1780 h

Trays capacity -
distance [mm]

16 x GN 2/1 - (75)
32 x GN 1/1 - (75)

Tray max. height GN
2/1 [mm]

16 x 65 (h)
6 x 150 (h)
4 x 200 (h) + 4 x 65 (h)

Tray max. height GN
1/1 [mm]

32 x 65 (h)
12 x 150 (h)
8 x 200 (h) + 8 x 65 (h)

Power supply

AC 220-240V 50/60Hz

Total input
[kW]

3 (230V)

Amps.
[A]

13,1 (230V)

Working temperature
[°C]

30 ÷ 120

Product max capacity
[Kg]

115

Net weight
[Kg]

106



- A Chamber Temperature
- B Cooking time or by Probe
- C Holding Temperature or Automatic Holding by Core Probe*
- D Programs (Save or Recall)
- E Increase value
- F Start / Stop
- G Decrease value
- H Info Display
- On/Off switch beside the board

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it