



item #
 model #
 project #
 sis #
 aia #



HOLD
HSW001E
 Warm holding drawer

**CONSTRUCTION
 FEATURES**

- Tightness chamber with radiused corners
- Total thermic insulation with rock or glass wool
- Long lasting drawers seals made up of food grade of high heat resistance
- Static heating provided by low consumption wire heating element that coils up all the chamber
- Ergonomic and fully built-in drawers handle with magnetic closure

**FUNCTIONAL
 FEATURES**

- Electronic control of the temperature
- Operating temperature 30° ÷ 120°C
- Adjustable moisture vent on the drawer
- Designed for stacking
- Suction feet
- Chamber with safety thermostat
- Manual keyboard lock

**STANDARD
 SUPPLY**

- Removable GN1/1 tray racks

**OPTIONS
 & ACCESSORIES**

- Frame with wheels
- Frame on feet
- Grids
- Trays
- UK plug
- Handles to carry by hand

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
 tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it






moduline

TECHNICAL INSTALLATION DIAGRAM

Electricity supply
cable inlet

Humidity exhaustion
vent

Important - Drawing and
dimensions refer to the
standard version.
They may change with the
addition of accessories or
options.

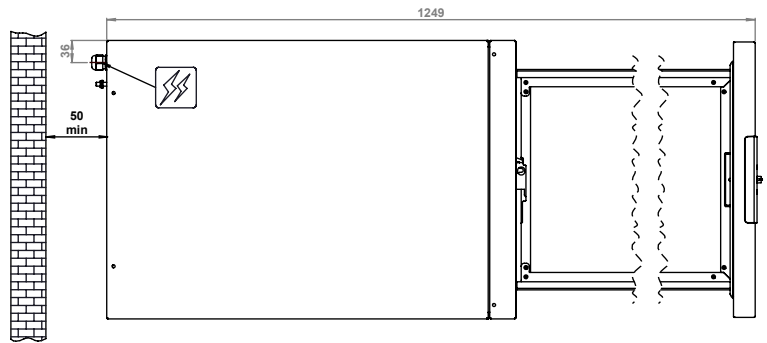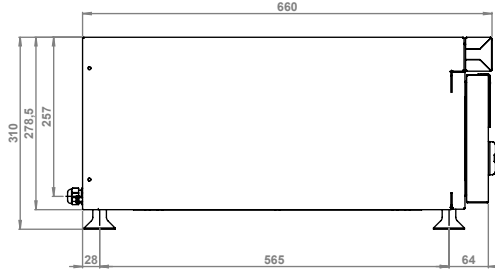

Overall dimensions
(W x D x H) - mm

450 x 660 x 310h

Power supply

AC 220-240V 50/60Hz

Total input
[kW]

0,7 (230V)

Amps.
[A]

3,1 (230V)

Working temperature
[°C]

30 ÷ 120

Trays capacity

1 GN 1/1

Containers max height
[mm]

150

Product max capacity
[Kg]

6

Net weight
[Kg]

22

A B



C D E

- A Display
- B ON/OFF switch
- C Temperature decrease key
- D Temperature increase key
- E START/STOP key

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it

01-2025