



item #
 model #
 project #
 sis #
 aia #



HOLD
HSW011E
 Warm holding drawer

**CONSTRUCTION
 FEATURES**

- Tightness chamber with radiused corners
- Total thermic insulation with rock or glass wool
- Long lasting drawers seals made up of food grade of high heat resistance
- Static heating provided by low consumption wire heating element that coils up all the chamber
- Ergonomic and fully built-in drawers handle with magnetic closure

**FUNCTIONAL
 FEATURES**

- Electronic control of the temperature
- Operating temperature 30° ÷ 120°C
- Adjustable moisture vent on the drawer
- Designed for stacking
- Suction feet
- Chamber with safety thermostat
- Manual keyboard lock

**STANDARD
 SUPPLY**

- Removable GN1/1 tray racks


**OPTIONS
 & ACCESSORIES**


- Frame with wheels
- Frame on feet
- Grids
- Trays
- UK plug
- Handles to carry by hand

MODULINESRL


Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
 tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it

TECHNICAL INSTALLATION DIAGRAM

Electricity supply
cable inlet 

Humidity exhaustion
vent 

Important - Drawing and
dimensions refer to the
standard version.
They may change with the
addition of accessories or
options.

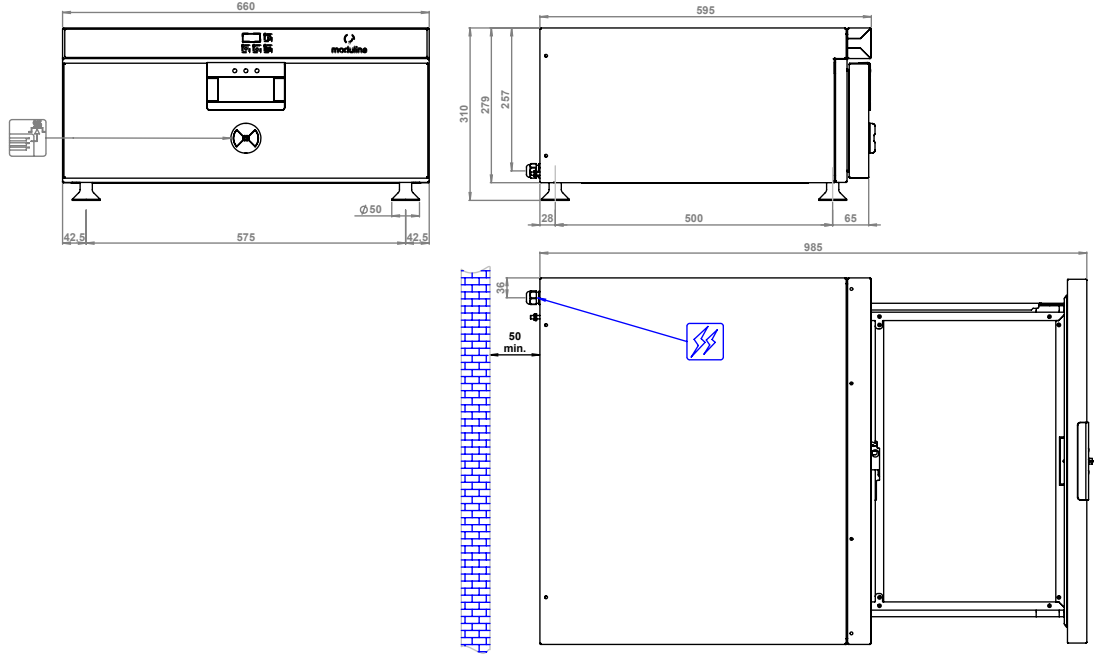

Overall dimensions (W x D x H) - mm	660 x 595 x 310h	Trays capacity	1 GN 1/1
Power supply	AC 220-240V 50/60Hz	Containers max height [mm]	150
Total input [kW]	0,7 (230V)	Product max capacity [Kg]	6
Amps. [A]	3,1 (230V)	Net weight [Kg]	31
Working temperature [°C]	30 ÷ 120		



- A Display
- B ON/OFF switch
- C Temperature decrease key
- D Temperature increase key
- E START/STOP key

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it