



REThERM RRD101E

Combined regeneration
oven to reheat refrigerated
food (+3°C)

CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- All-around rubber bumpers
- Total thermic insulation with rock or glass wool
- Long lasting front seal, made up of food-grade and high-heat resistant silicone
- Removable side racks to facilitate cleaning
- Internal drain for easy cleaning
- Ventilated heating provided by high efficiency protected heating elements
- Ventilated cooling provided by stainless steel evaporator
- Ecological compressor units (R452A)
- Snap-shut door
- Four swivel wheels of which 2 with brake
- Ergonomic handles for pushing and guiding
- Easy access to facilitate maintenance and repair

FUNCTIONAL FEATURES

- Electronic control panel of temperature, time and humidity with LCD 4,3" touch-screen
- Intelligent temperature decrease in the cavity at the end of the regenerating cycle allows a perfect warm holding
- Simplified, user-friendly control
- Operating temperature: 0°C – 160°C
- Manual humidity vent
- Combined cavity periodic reversal of direction of rotation of the fans for better cold/hot air distribution
- Concealed water storage tank
- End-of-cycle buzzer
- Chamber with safety thermostat
- Delayed start timer

STANDARD SUPPLY

- Removable GN 1/1 tray racks
- Speedgrade fan speed reduction system

OPTIONS & ACCESSORIES

- Single-point core probe
- Automatic humidity vent (Climachef)
- USB port saving device HACCP
- Multipoint core probe
- Needle core probe, thin
- Glass door and lighting
- Opposite side opening
- One Touch software
- Side racks 600x400
- Grids
- Trays

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
 tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it



moduline

TECHNICAL INSTALLATION DIAGRAM

Electricity supply
cable inlet



Adjustable vent for
excess humidity





Chamber drain
and condensation
drain tray



Softened
water tank




Important - Drawing and
dimensions refer to the
standard version.
They may change with the
addition of accessories
or options.

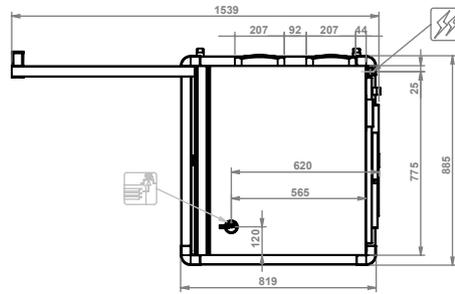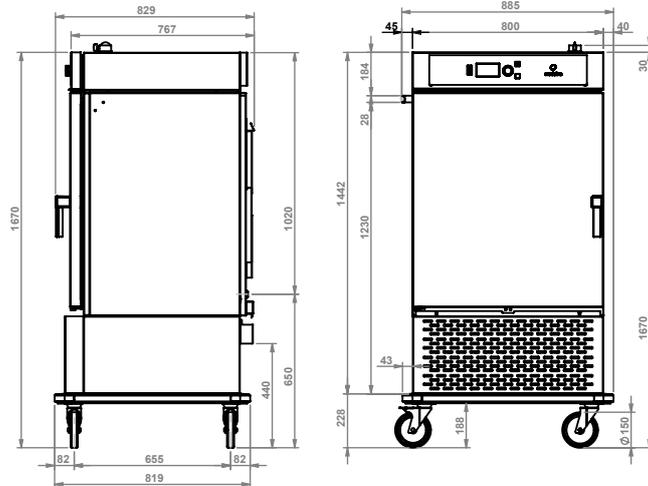

Overall dimensions (W x D x H) - mm	885 x 829 x 1700h
Trays capacity	10 x GN 1/1 or 600 x 400
Distance [mm]	76
Plates capacity (tray racks GN1/1)	20 ø 200 - 260 10 ø 270 - 300
Power supply	380-415V 3N 50Hz

Working temperature [°C]	0 ÷ 160
Product max capacity [Kg]	36
Total input [kW]	6,8 (400V)
Amps. [A]	9,9 (400V)
Net weight [Kg]	159

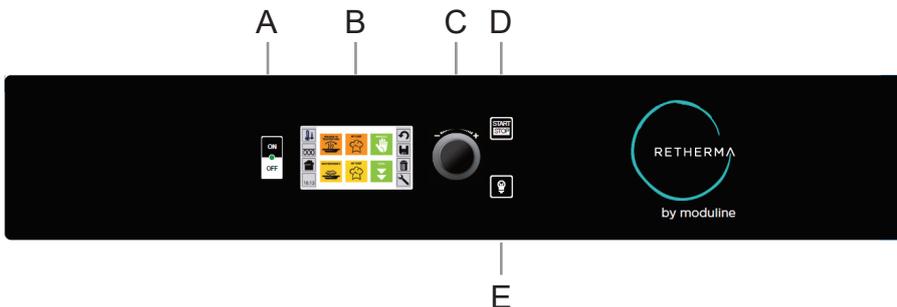

- A ON/OFF switch
- B Display Touch Screen
- C Setting knob
and select "ENTER"
- D "START/STOP" button
- E Chamber light button

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it