



REThERM RRFF40E

Regeneration oven
to reheat refrigerated
food (+3°C)

CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Internal AISI 304 18/10 stainless steel bumpers for trolley's introduction
- Total thermic insulation with rock or glass wool
- Long lasting front seals made up of food grade of high heat resistance
- Ventilated heating provided by high efficiency protected heating elements
- Door fitted with three point locking system
- Easy access to facilitate maintenance and repair

FUNCTIONAL FEATURES

- Electronic control panel of temperature, time and humidity with LCD 4,3" touch-screen
- End-of-cycle buzzer
- Simplified, user-friendly control
- Automatic control of the humidity's percentage in the chamber, Climachef system
- Operating temperature: 30°C – 160°C
- Automatic humidity vent
- Chamber can accommodate different sized plate or tray rack transport trolleys
- Chamber with safety thermostat
- Delayed start timer
- Intelligent temperature decrease in the cavity at the end of the regenerating cycle allows a perfect warm holding

STANDARD SUPPLY

- Climachef
- USB port saving device HACCP
- Single-point core probe

OPTIONS & ACCESSORIES

- GN pans cart
- Plates cart
- Cart thermal cover
- Multipoint core probe
- Speedgrade fan speed reduction system
- External hand shower
- Needle core probe, thin
- One Touch software
- Grids
- Trays



moduline

TECHNICAL INSTALLATION DIA- GRAM

Electricity supply
cable inlet

Softened
water inlet

Adjustable vent
for excess humidity

Important - Drawing and
dimensions refer to the
standard version.
They may change with the
addition of accessories
or options.

Overall dimensions
(W x D x H) - mm

1179 x 1207 x 1967h

Oven interior
(W x D x H) - mm

780 x 965 x 1860h

Trays capacity

40 x GN 1/1 h65
20 x GN 2/1 h65

Plates capacity
Plates Ø 230-310

126

Power supply

380-415V 3N 50/60Hz

Total input
[kW]

23,2 (400V)

Amps.
[A]

33,6 (400V)

Water pressure [kPa]

150 ÷ 500

Working temperature
[°C]


30 ÷ 160

Product max capacity
[Kg]

144

Net weight
[Kg]

246

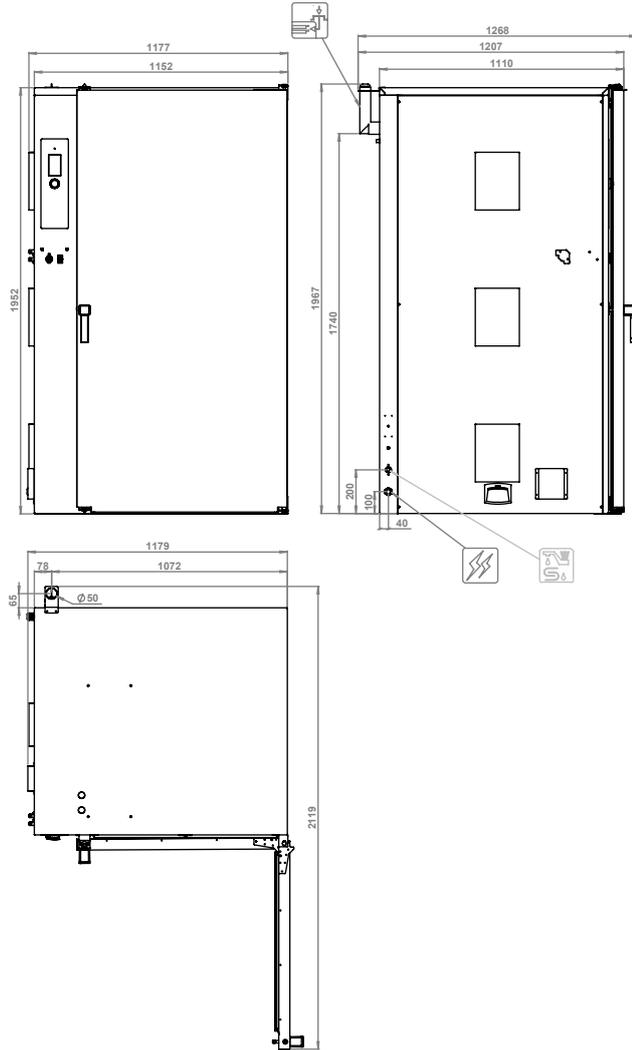

E Version

- A ON/OFF switch
- B Display Touch Screen
- C Setting knob and select "ENTER"
- D "START/STOP" button

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it