



RE THERM
RRS090C
 Regeneration oven
 to reheat refrigerated
 (+3°C) and frozen food
 (-18°C)

**CONSTRUCTION
 FEATURES**

- Tightness chamber with radiused corners
- Total thermic insulation with rock or glass wool
- Long lasting front seal, made up of food-grade and high-heat resistant silicone
- Removable side racks to facilitate cleaning
- Ventilated heating provided by high efficiency protected heating elements
- Snap-shut door
- Adjustable feet
- Easy access to facilitate maintenance and repair

**FUNCTIONAL
 FEATURES**

- Control panel of temperature electromechanical
- Simplified, user-friendly controls
- Operating temperature 30°C - 160°C
- Humidity vent
- Periodic reversal of direction of rotation of the fan for better air distribution
- Automatic stopping of fans when is opened
- End-of-cycle buzzer
- Chamber with safety thermostat

STANDARD SUPPLY

- Removable GN 2/3 tray racks

**OPTIONS &
 ACCESSORIES**

- Support
- Grids
- Trays

MODULINESRL




moduline

TECHNICAL INSTALLATION DIAGRAM

Electricity supply cable inlet 

Vent for excess humidity 

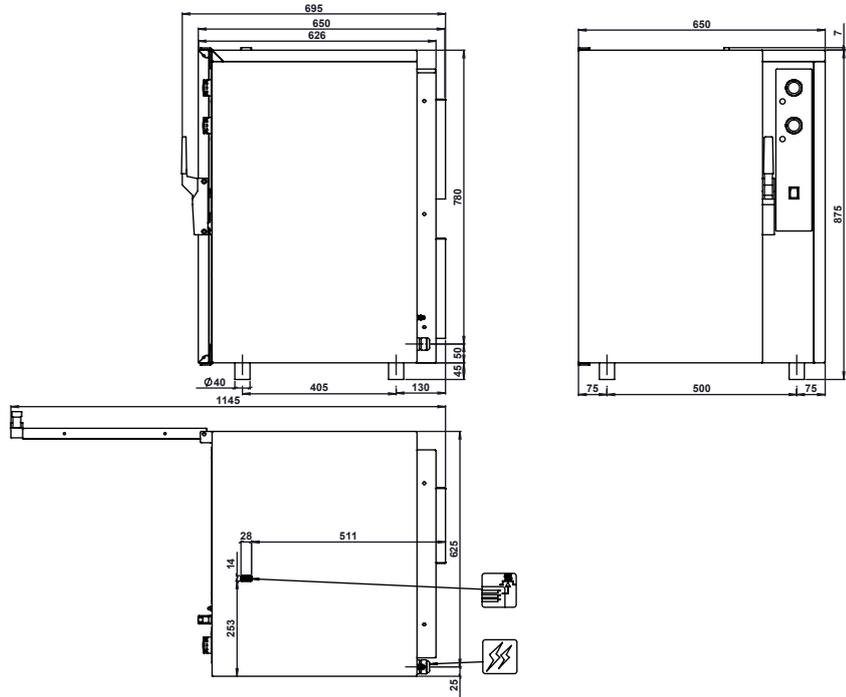

Overall dimensions (W x D x H) - mm 650 x 650 x 882h

Trays capacity 9 GN 2/3

Plates capacity 9 Ø 200-320

Power supply 380-415V 3N 50/60Hz

Total input [kW] 6,8 (400V)


Amps. [A] 9,9 (400V)

Operating temperature [°C] 30 ÷ 160

Product max capacity [Kg] 21,5

Distance [mm] 75

Net weight [Kg] 59

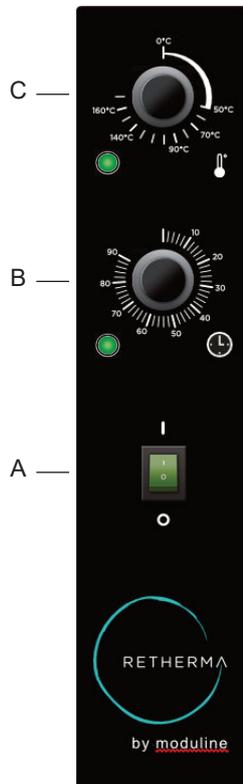

With electromechanical control

- A On/Off switch
- B Regenerating time setting knob, with warning light indicating operation
- C Temperature regulation knob, with warning light to show that temperature has been reached

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it