

item #	
model #	
project #	
sis#	
aia #	



COOK&HOLD CHC082E

Static low temperature oven

CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Total thermic insulation with rock or glass wool
- Long lasting frontal seals made up of food grade of high heat resistance
- Static heating provided by low consumption wire heating element that coils up all the chamber
- Snap-shut door
- Mounted on four 125mm diameter castors, two of which with brake
- All-around rubber bumpers
- Tightness cavity with radiuses corners, built-in drip tray and drainage system

FUNCTIONAL FEATURES

- ullet Electronic control panel of temperature, time, core probe and Δt with LCD touch-screen
- Operating temperature 30°C 160°C
- End-of-cycle buzzer
- Chamber with safety thermostat
- Internal drain for easy cleaning
- Condensation drain tray
- Delayed start timer

STANDARD SUPPLY

- Multipoint core probe with the possibility to register 30 different temperatures and save them in the HACCP report (available only with USB port device)
- Glazed door plus lighting
- Removable GN 2/1 and GN 1/1 tray racks
- USB port saving device HACCP

OPTIONS & ACCESSORIES

EcoWash self-cleaning system	Trays
Opposite side opening	Water filter system
Grids	Detergent/Rinsing agent

MODULINESRL



TECHNICAL INSTALLATION DIAGRAM


Electricity supply cable inlet



Chamber drain



Important - Drawing and dimensions refer to the standard version. They may change with the addition of accessories or options.

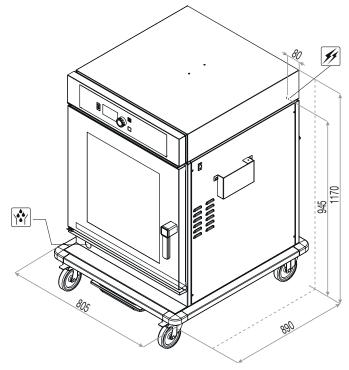

Overall dimensions $(W \times D \times H) - mm$

805 x 890 x 1170h

Power supply

AC 220-240V 50/60Hz

Total input [Kw]

2,8 (230V)

2,95 (230V) With Ecowash self-cleaning system

Amps.

12,2 (230V)

[A]

12,9 (230V) With Ecowash self-cleaning system

Working temperature [°C]

30 ÷ 160


Containers capacity - distance [mm] 8 GN 2/1 - (75) 16 GN 1/1 - (75)

Product max capacity [Kg]

55

Net weight [Kg]

100

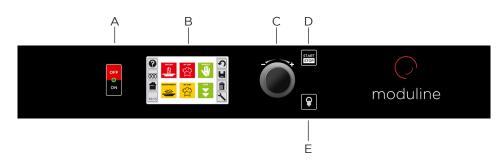

- A ON/OFF switch
- В Display Touch Screen
- С Setting knob and select "ENTER"
- D "START/STOP" button
- Chamber light button

MODULINESRL